
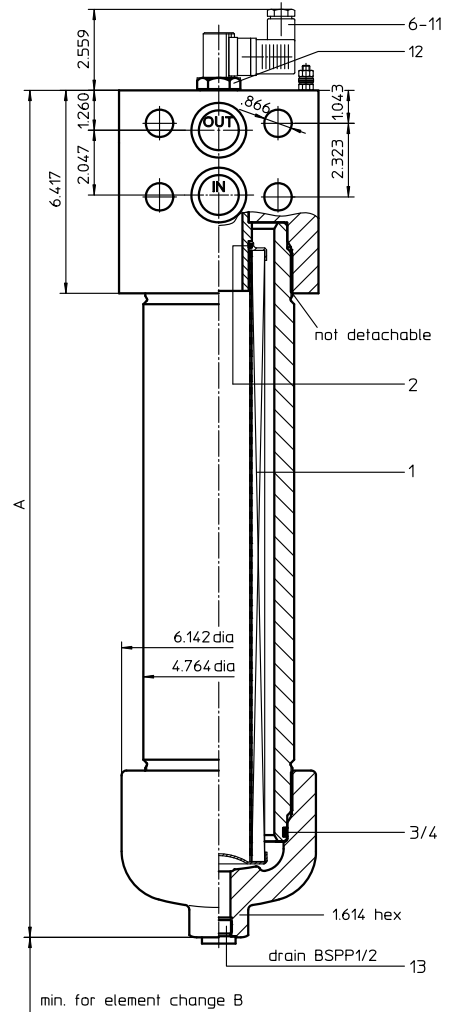


# Series HPX 601-1351 4568 PSI

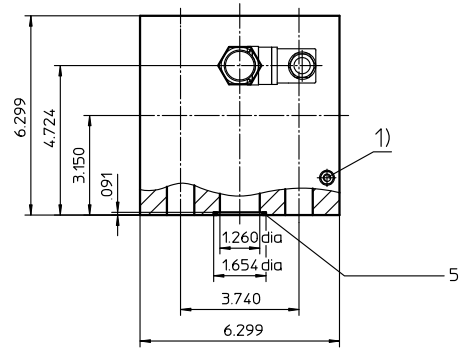


1) Connect the stand grounding tab to a suitable earth ground point.

**Dimensions:**

| type        | HPX 601  | HPX 901  | HPX 1351  |
|-------------|----------|----------|-----------|
| connection  |          | 1 1/4"   |           |
| A           | 20.86    | 26.77    | 36.53     |
| B           | 12.20    | 18.11    | 27.95     |
| weight lbs. | 121      | 136      | 163       |
| volume tank | .55 Gal. | .82 Gal. | 1.21 Gal. |

**possible connection masses**

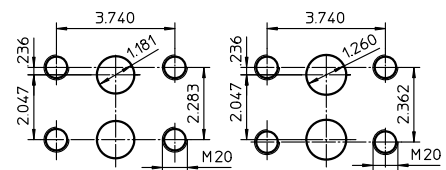

Dimensions: inches

Designs and performance values are subject to change.



Powering Business Worldwide

# Pressure Filter

## Series HPX 601-1351

### 4568 PSI

#### Description:

Pressure filter series HPX 601-1351 have a working pressure up to 4568 PSI. The HPX filters are manifold mounted.

The filter element consists of star-shaped, pleated filter material, which is supported on the inside by a perforated core tube and is bonded to the end caps with a high-quality adhesive. The flow direction is from outside to inside. Filter elements are available down to 4  $\mu\text{m}_{(c)}$ .

Eaton filter elements are known for high intrinsic stability and an excellent filtration capability, a high dirt-retaining capacity and a long service life.

Eaton filter elements can be used for petroleum-based fluids, HW emulsions, water glycols, most synthetic fluids and lubrication fluids. Consult factory for specific fluid applications.

Eaton filter elements are available up to a pressure resistance of  $\Delta p$  2320 PSI and a rupture strength of  $\Delta p$  3625 PSI.

The internal valve is integrated into the filter head. After reaching the bypass pressure setting, the bypass valve will send unfiltered partial flow around the filter.

The reversing valve provides another level of protection for the filter element. The reverse flow will not be filtered.

## 1. Type index:

### 1.1. Complete filter: (ordering example)

**HPX. 901. 10VG. HR. E. P. - . F. 6. - . - . AE**

|   |   |   |   |   |   |   |   |   |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---|---|---|---|---|---|---|---|---|----|----|----|

#### 1 series:

HPX = pressure filter

#### 2 nominal size: 601, 901, 1351

#### 3 filter-material and filter-fineness:

80G, 40G, 25G, 10G stainless steel wire mesh  
25VG, 16VG, 10VG, 6VG, 3VG microglass

#### 4 filter element collapse rating:

30 =  $\Delta p$  435 PSI  
HR =  $\Delta p$  2320 PSI (rupture strength  $\Delta p$  3625 PSI)

#### 5 filter element design:

E = single-end open

#### 6 sealing material:

P = Nitrile (NBR)  
V = Viton (FPM)

#### 7 filter element specification: (see catalog)

- = standard  
VA = stainless steel  
IS06 = for HFC applications, see sheet-no. 31601

#### 8 process connection:

F = manifold mounted

#### 9 process connection size:

6 = 1 1/4"

#### 10 filter housing specification: (see catalog)

- = standard  
IS06 = for HFC applications, see sheet no.31605

#### 11 internal valve:

- = without  
S1 = with bypass valve  $\Delta p$  51 PSI  
S2 = with bypass valve  $\Delta p$  102 PSI  
R = reversing valve,  $Q \leq 55.75$  GPM

#### 12 clogging indicator or clogging sensor:

- = without  
AOR = visual, see sheet-no. 1606  
AOC = visual, see sheet-no. 1606  
AE = visual-electric, see sheet-no. 1615  
VS5 = electronic, see sheet-no. 1619

To add an indicator to your filter, use the corresponding indicator data sheet to find the indicator details and add them to the filter assembly model code.

### 1.2. Filter element: (ordering example)

**01E. 900. 10VG. HR. E. P. -**

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

#### 1 series:

01E. = filter element according to company standard

#### 2 nominal size: 600, 900, 1350

#### 3 - 7 see type index-complete filter

## Technical data:

|                          |  |
|--------------------------|--|
| design temperature:      | 14 °F to +212 °F   |
| operating temperature:   | 14 °F to +176 °F   |
| operating medium         | mineral oil, other media on request                      |
| max. operating pressure: | 4568 PSI   |
| test pressure:           | 6532 PSI   |
| process connection:      | manifold mounted   |
| housing material:        | C-steel  |
| sealing material:        | Nitrile (NBR) or Viton (FPM), other materials on request |
| installation position:   | vertical   |

Classified under the Pressure Equipment Directive 2014/68/EC for mineral oil (fluid group 2), Article 4, Para. 3.  
 Classified under ATEX Directive 2014/34/EC according to specific application (see questionnaire sheet-no. 34279-4)

## Pressure drop flow curves:

### Filter calculation/sizing

The pressure drop of the assembly at a given flow rate Q is the sum of the housing  $\Delta p$  and the element  $\Delta p$  and is calculated as follows:

$$\Delta p_{assembly} = \Delta p_{housing} + \Delta p_{element}$$

$$\Delta p_{housing} = (\text{see } \Delta p = f(Q) \text{ - characteristics})$$

$$\Delta p_{element} (PSI) = Q (GPM) \times \frac{MSK}{1000} \left( \frac{PSI}{GPM} \right) \times \nu (SUS) \times \frac{\rho}{0.876} \left( \frac{kg}{dm^3} \right)$$

For ease of calculation our Filter Selection tool is available online at [www.eatonpowersource.com/calculators/filtration/](http://www.eatonpowersource.com/calculators/filtration/)


### Material gradient coefficients (MSK) for filter elements

The material gradient coefficients in PSI/GPM apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup> and a kinematic viscosity of 139 SUS (30 mm<sup>2</sup>/s). The pressure drop changes proportionally to the change in kinematic viscosity and density.


| HPX  | VG    |       |       |       |       | G      |        |        |
|------|-------|-------|-------|-------|-------|--------|--------|--------|
|      | 3VG   | 6VG   | 10VG  | 16VG  | 25VG  | 25G    | 40G    | 80G    |
| 601  | 0.963 | 0.669 | 0.428 | 0.368 | 0.251 | 0.0303 | 0.0282 | 0.0193 |
| 901  | 0.668 | 0.464 | 0.297 | 0.225 | 0.174 | 0.0189 | 0.0177 | 0.0121 |
| 1351 | 0.417 | 0.290 | 0.185 | 0.185 | 0.109 | 0.0122 | 0.0114 | 0.0078 |

### $\Delta p = f(Q)$ – characteristics according to ISO 3968

The pressure drop characteristics apply to mineral oil (HLP) with a density of 0.876 kg/dm<sup>3</sup>. The pressure drop changes proportionally to the density.

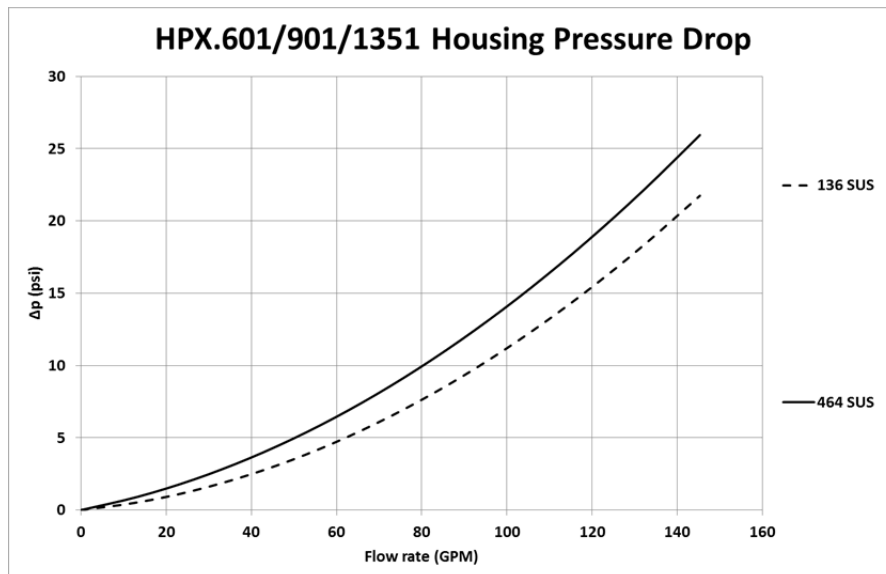

## Symbols:

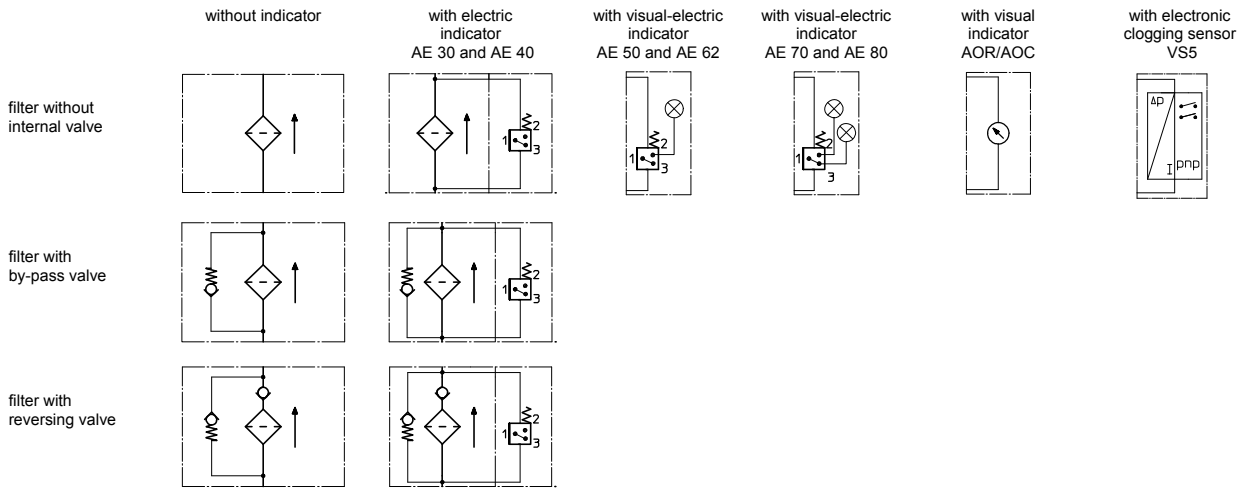

## Spare parts:

| item | qty. | designation                         | dimension  |               |             | article-no.        |              |
|------|------|-------------------------------------|------------|---------------|-------------|--------------------|--------------|
|      |      |                                     | HPX 601    | HPX 901       | HPX 1351    |                    |              |
| 1    | 1    | filter element                      | 01E.600... | 01E.900...    | 01E.1350... |                    |              |
| 2    | 1    | O-ring                              |            | 48 x 3        |             | 304357 (NBR)       | 304404 (FPM) |
| 3    | 1    | O-ring                              |            | 98 x 4        |             | 301914 (NBR)       | 304765 (FPM) |
| 4    | 1    | support ring                        |            | 110 x 3,5 x 2 |             | 304802             |              |
| 5    | 2    | O-ring                              |            | 36 x 3        |             | 304358 (NBR)       | 313900 (FPM) |
| 6    | 1    | clogging indicator, visual          |            | AOR or AOC    |             | see sheet-no. 1606 |              |
| 7    | 1    | clogging indicator, visual-electric |            | AE            |             | see sheet-no. 1615 |              |
| 8    | 1    | clogging sensor, electronic         |            | VS5           |             | see sheet-no. 1619 |              |
| 9    | 1    | O-ring                              |            | 15 x 1,5      |             | 315357 (NBR)       | 315427 (FPM) |
| 10   | 1    | O-ring                              |            | 22 x 2        |             | 304708 (NBR)       | 304721 (FPM) |
| 11   | 1    | O-ring                              |            | 14 x 2        |             | 304342 (NBR)       | 304722 (FPM) |
| 12   | 1    | screw plug                          |            | 20913-4       |             | 309817             |              |
| 13   | 1    | screw plug                          |            | BSPP ½        |             | 304678             |              |

item 12 execution only without clogging indicator or clogging sensor

## Test methods:

Filter elements are tested according to the following ISO standards:

|           |   |
|-----------|---|
| ISO 2941  | Verification of collapse/burst resistance               |
| ISO 2942  | Verification of fabrication integrity                   |
| ISO 2943  | Verification of material compatibility with fluids      |
| ISO 3723  | Method for end load test                                |
| ISO 3724  | Verification of flow fatigue characteristics            |
| ISO 3968  | Evaluation of pressure drop versus flow characteristics |
| ISO 16889 | Multi-pass method for evaluating filtration performance |

### North America

44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

### Europe/Africa/Middle East

Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlußheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

### China

No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

### Singapore

4 Loyang Lane #04-01/02  
Singapore 508914  
Tel: +65 6825-1668

### Brazil

Av. Julia Gaioli, 474 – Bonsucesso  
07251-500 – Guarulhos, Brazil  
Tel: +55 11 2465-8822

## For more information, please

email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)

© 2015 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.