



Efficient and economical fully-welded needle felt filter bags

Eaton's UNIBAG filter bags are suitable for a wide range of applications such as the filtration of automotive paints and varnishes, inks, chemicals, process water and many more.

UNIBAG filter bags provide the value and reliability of a high performance filter bag seal, fully-welded construction, the economy of a typical sewn filter bag construction and the social commitment to using environmentally-friendly materials. They are manufactured from needle felt material, without optical white additives or bleaching agents. They comply with the industry standard for bypass-free filter bag construction and are available in polypropylene and polyester. Polyester material uses at least 40% recycled fibers.

Features and benefits

- Fully-welded construction with UNIRING™ seal ring provides 100% bypass-free filtration
- Polypropylene seal ring provides a chemically resistant seal which adapts to any bag filter housing

- Polyester seal ring is durable for higher temperatures
- Special surface treatment significantly reduces fiber release
- Stable and flexible welded seams that adapt to the restrainer basket
- The handles in the ring make replacing the filter bag quick and easy
- All material has passed Eaton's rigorous Engineering Standard testing criteria for acceptability
- Material is free from silicone and crater-forming substances¹
- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

Filter specifications

Materials

Needle felt polypropylene or polyester

Seal rings

Welded polypropylene or polyester UNIRING seal ring

Retention ratings

1, 5, 10, 25, 50, 100, 200 µm

Dimensions/Parameters

Sizes

01: Ø 7 x 17" L (180 x 430 mm)
02: Ø 7 x 32" L (180 x 810 mm)

Filter area

01: 2.6 ft² (0.24 m²)
02: 5.2 ft² (0.48 m²)

Max. operating temperatures

Polypropylene: 194 °F (90 °C)
Polyester: 302 °F (150 °C)

Max. differential pressure

36.2 psi (2.5 bar)

Recommended change-out pressure for disposal²

11.6 – 21.7 psi (0.8 – 1.5 bar)

Max. flow rates³

01: 88 GPM (20 m³/h)
02: 176 GPM (40 m³/h)




Powering Business Worldwide

UNIBAG Filter Bag Range

Ranges/Materials	Man. operating temperatures °F (°C)	Aqueous media	Aliphatic solvents	Aeromatic solvents	Alkaline media	Strongly alkaline	Acid media	Strongly acid
POU-UE	194 (90)	■	■		■	■	■	■
PEU-UE	194 (90)	■	■		■		■	
PEU-UK	302 (150)	■	■	■	■		■	

Ordering information

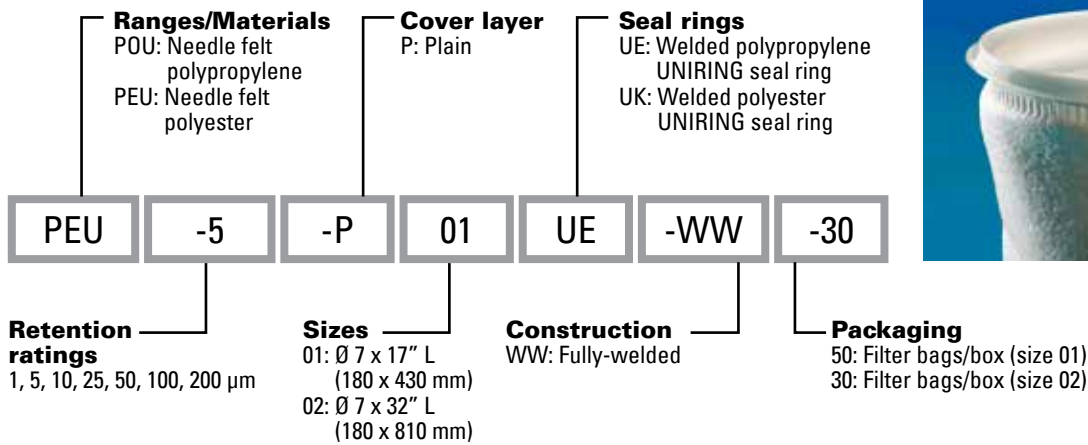

¹ Based on an accepted paint compatibility test.

² Depending on the respective application requirements.

³ For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

North America
 44 Apple Street
 Tinton Falls, NJ 07724
 Toll Free: 800 656-3344
 (North America only)
 Tel: +1 732 212-4700

China
 No. 3, Lane 280,
 Linhong Road
 Changning District, 200335
 Shanghai, P.R. China
 Tel: +86 21 5200-0099

Europe/Africa/Middle East
 Auf der Heide 2
 53947 Nettersheim, Germany
 Tel: +49 2486 809-0

Singapore
 4 Loyang Lane #04-01/02
 Singapore 508914
 Tel: +65 6825-1668

Friedensstraße 41
 68804 Altlufheim, Germany
 Tel: +49 6205 2094-0
 An den Nahewiesen 24
 55450 Langenlonsheim, Germany
 Tel: +49 6704 204-0

Brazil
 Av. Julia Gaioli, 474 – Bonsucesso
 07251-500 – Guarulhos, Brazil
 Tel: +55 11 2465-8822

For more information, please
 email us at filtration@eaton.com
 or visit www.eaton.com/filtration

© 2016 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
 EF-FTB-09
 06-2016