



# XMP ci

## Process Pressure Transmitter with HART<sup>®</sup>-communication

Ceramic Sensor

accuracy according to IEC 60770:  
0.1 % FSO

### Nominal pressure

from 0 ... 160 mbar up to 0... 20 bar

### Output signals

2-wire: 4 ... 20 mA  
others on request

### Special characteristics

- ▶ turn-down 1:5
- ▶ two chamber aluminium die cast case or stainless field housing
- ▶ internal or flush mounted capacitive ceramic sensor
- ▶ HART<sup>®</sup>-communication
- ▶ IS-version:  
Ex ia = intrinsically safe version
- ▶ diaphragm Al<sub>2</sub>O<sub>3</sub> 99.9 %

### Optional versions

- ▶ IS-version: Ex d = flameproof enclosure
- ▶ with integrated display and operating module
- ▶ several process connections (thread, flange, DRD etc.)

The process pressure transmitter XMP ci measures the pressure of gases, steam and fluids. The special-developed capacitive ceramic sensor for this transmitter has a high overpressure capability and excellent media stability.

Several process connections e.g. thread or flange are available. The transmitter is as a standard equipped with HART<sup>®</sup>-communication, the customer can choose between a two chamber aluminum die cast case or a stainless field housing.

### Preferred areas of use are

-  Oil and gas industry
-  Chemical and petrochemical industry

### Preferred using in


-  Fuel and Oil
-  aggressive Media



Pressure ranges <sup>1</sup>								
Nominal pressure gauge	[bar]	0.16	0.4	1	2	5	10	20
Overpressure	[bar]	4	6	8	15	25	35	45
Permissible vacuum	[bar]	-0.3	-0.5					-1
<sup>1</sup> On customer request we adjust the devices by software to the required pressure ranges. Within the turn-down-possibility (starting at 0.02 bar).								
Output signal / Supply								
Standard	2-wire: 4 ... 20 mA intrinsically safe version with HART®-communication / V <sub>S</sub> = 12 ... 28 V <sub>DC</sub>							
Option	IS version flameproof enclosure / V <sub>S</sub> = 13 ... 28 V <sub>DC</sub>							
Current consumption	max. 25 mA							
Performance								
Accuracy <sup>2</sup>	nominal pressure < 1 bar: ≤ ± 0.2 % FSO							
	nominal pressure ≥ 1 bar: ≤ ± 0.1 % FSO							
	for nominal pressure ranges: from 0.16 bar up to 0.4 bar			≤ ± (0.2 + (TD-1) x 0.02) % FSO				
	for nominal pressure ranges: from 1 bar up to 20 bar			≤ ± (0.1 + (TD-1) x 0.01) % FSO				
with turn-down = nominal pressure range / adjusted range								
Permissible load	R <sub>max</sub> ≤ [(V <sub>S</sub> - V <sub>S min</sub> ) / 0.02 A] Ω			load during HART®-communication: R <sub>min</sub> = 250 Ω				
Influence effects	supply: 0.05 % FSO / 10 V			permissible load: 0.05 % FSO / kΩ				
Long term stability	≤ ± 0.1 % FSO / year at reference conditions							
Response time	200 msec – without consideration of electronic damping			measuring rate 5/sec				
Adjustability	electronic damping: 0 ... 100 sec offset 0 ... 80 % FSO turn-down of span: max. 1:5 (span min. 0.02 bar)							
<sup>2</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)								
Thermal errors / Permissible temperatures								
Thermal error	≤ ± (0.02 x turn-down) % FSO / 10 K in compensated range -20 ... 80 °C							
Permissible temperatures <sup>3</sup>	without display: medium: -25 ... 125 °C		environment: -40 ... 70 °C		storage: -40 ... 80 °C			
	with display: medium: -25 ... 125 °C		environment: -20 ... 70 °C		storage: -30 ... 80 °C			
<sup>3</sup> for pressure port of PVDF the minimum permissible temperature is -30 °C								
Electrical protection								
Short-circuit protection	permanent							
Reverse polarity protection	no damage, but also no function							
Electromagnetic compatibility	emission and immunity according to EN 61326							
Mechanical stability								
Vibration	5 g RMS (20 ... 2000 Hz)							
Shock	100 g / 11 msec							
Materials								
Pressure port	stainless steel 1.4404 (316L)							
Standard	PVDF							
Optionally for G1 1/2" flush	PVDF							
Housing	aluminium die cast, powder-coated or stainless steel 1.4404 (316L)							
Cable gland	brass, nickel plated							
Viewing glass	laminated safety glass							
Seals (media wetted)	FKM (permissible temperature: -25 ... 125 °C) EPDM (permissible temperature: -40 ... 125 °C) others on request							
Diaphragm	ceramics Al <sub>2</sub> O <sub>3</sub> 99.9 %							
Media wetted parts	pressure port, seal, diaphragm							
Explosion protection								
Approval AX12-XMP ci (intrinsically safe version)	IBExU 05 ATEX 1106 X stainless steel field housing: zone 0/1 <sup>4</sup> : II 1/2G Ex ia IIC T4 Ga/Gb zone 20: II 1D Ex ia IIIC T85 °C Da aluminium die cast case: zone 1: II 2G Ex ia IIB T4 Gb zone 20: II 1D Ex ia IIIC T85 °C Da							
Safety techn. maximum values	U <sub>i</sub> = 28 V, I <sub>i</sub> = 98 mA, P <sub>i</sub> = 680 mW, C <sub>i</sub> = 0 nF, L <sub>i</sub> = 0 μH, C <sub>GND</sub> = 27 nF							
Approval AX17-XMP ci (flameproof enclosure)	IBExU 12 ATEX 1045 X aluminium die cast case: zone 1: II 2G Ex d IIC T5 Gb							
Permissible temperatures for environment	in zone 0: -40 ... 60 °C with p <sub>atm</sub> 0.8 bar up to 1.1 bar in zone 1 or higher: -40 ... 70 °C (intrinsically safe version); -20 ... 70 °C (flameproof enclosure)							
<sup>4</sup> The designation depends on the nominal pressure range. Nominal pressure ranges ≤ 60 mbar are marked with „2G“. For nominal pressure ranges > 60 mbar and < 10 bar see note under item 17 in the EC type-examination certificate!								

Miscellaneous	
Display (optionally)	LC-display, visible range 32.5 x 22.5 mm; 5-digit 7-segment main display, digit height 8 mm, range of indication $\pm 9999$ ; 8-digit 14-segment additional display, digit height 5 mm; 52-segment bargraph; accuracy 0.1% $\pm$ 1 digit
Ingress protection	IP 67
Installation position	any
Weight	min. 400 g (depending on housing and mechanical connection)
Operational life	> 100 x 10 <sup>5</sup> pressure cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

### Wiring diagram

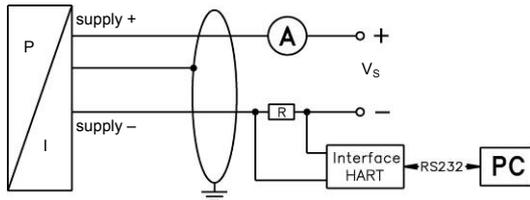


### Pin configuration

Electrical connections	aluminium die cast case: terminal clamps (clamp section: 2.5 mm <sup>2</sup> )	stainless steel field housing: terminal clamps (clamp section: 1.5 mm <sup>2</sup> )
Supply +	IN+	IN+
Supply -	IN-	IN-
Test	Test	-
Shield	⊥	⊥


### Housing designs <sup>5</sup> (dimensions in mm)

#### aluminium die cast case with display

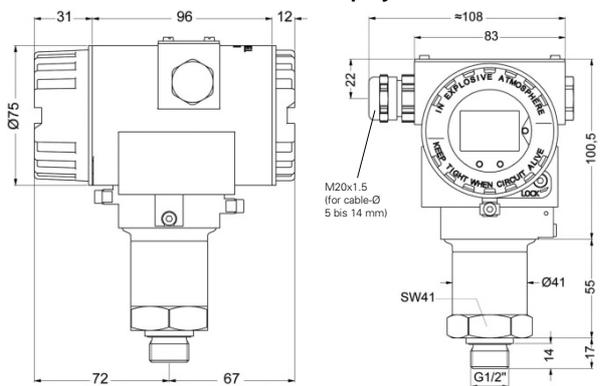


G1/2" DIN 3852

#### stainless steel field housing with display

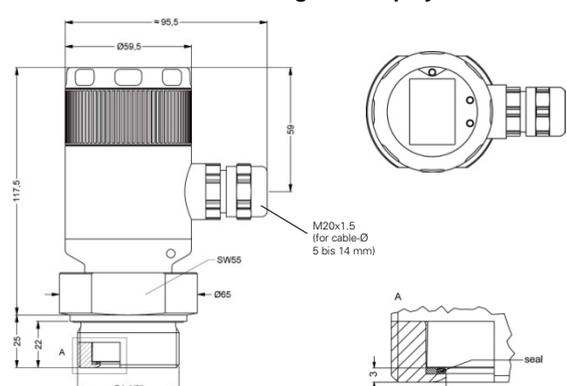


G1 1/2" flush DIN 3852

#### aluminium die cast case without display

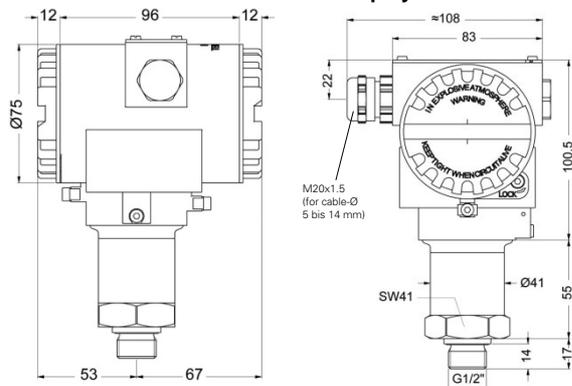

G1/2" DIN 3852




#### stainless steel field housing without display

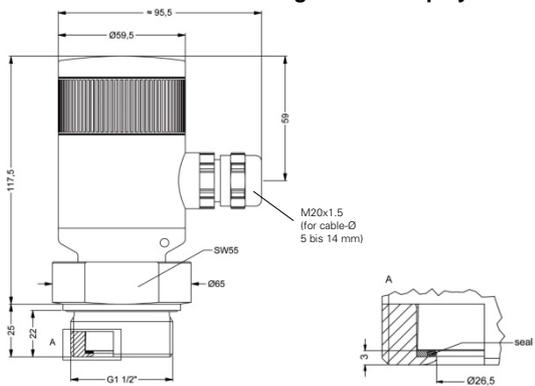

G1 1/2" flush DIN 3852


<sup>5</sup> aluminium die cast case is horizontally rotatable as standard

**Standard pressure ports (dimensions in mm)**

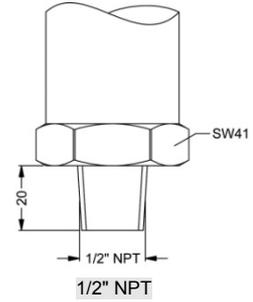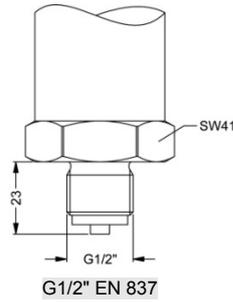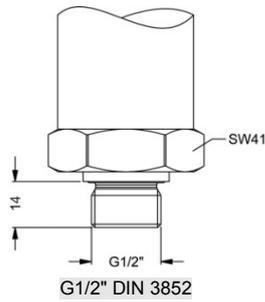


**Process connections (dimensions in mm)**


**Inch thread**

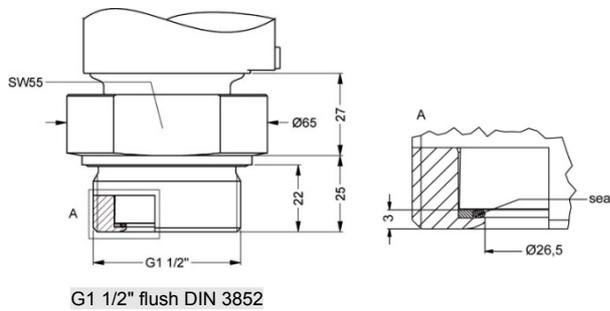


**DRD<sup>6</sup>**

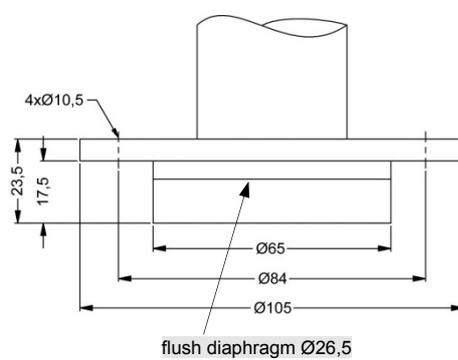

**Flange (DIN 2501)**

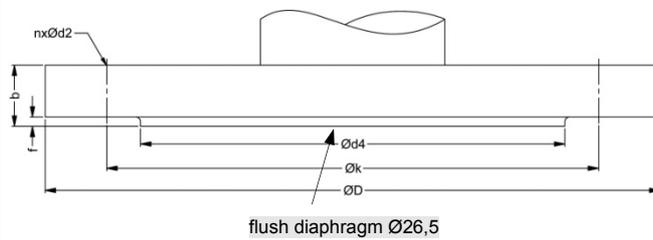

**Flange (ANSI)**

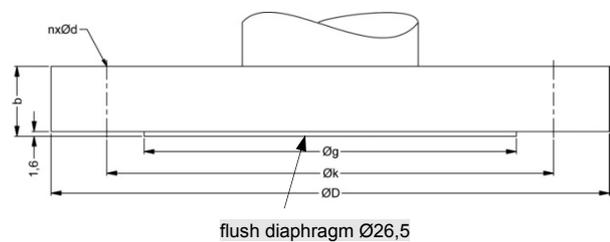

dimensions in mm			
size	DN25	DN50	DN80
D	115	165	200
k	85	125	160
d4	68	102	138
b	18	20	20
f	2	3	3
n	4	4	8
d2	14	18	18
P <sub>N</sub>	≤ 40 bar	≤ 40 bar	≤ 16 bar

dimensions in mm		
size	2"/150 lbs	3"/150 lbs
D	152.4	190.5
g	91.9	127
k	120.7	152.4
b	19.1	23.9
n	4	4
d	19.1	19.1
P <sub>N</sub>	≤ 10 bar	≤ 10 bar

<sup>6</sup> mounting flange is included in the delivery (already pre-assembled)  
 HART® is a registered trade mark of HART Communication Foundation;  
 Windows® is a registered trade mark of Microsoft Corporation

