



DM01

Battery Powered Precision Digital Gauge

Stainless Steel Sensor

class 0.05

Nominal pressure

from 0 ... 100 mbar up to 0 ... 400 bar

Special characteristics

- ▶ modular sensor concept
- ▶ data logger
- ▶ graphic display
- ▶ stainless steel housing \varnothing 100 mm
- ▶ communication interface USB 2.0

Optional

- ▶ accredited calibration certificate
- ▶ IS-version zone 1
- ▶ software incl. USB converter
- ▶ service case with accessories

Functions

- ▶ zero point calibration
- ▶ data logger
- ▶ turn off automatic
- ▶ configurable switch-off automatic
- ▶ background illumination

The digital pressure gauge DM01 is a precision device fulfilling highest demands. It was conceived especially for the process monitoring and calibration. The advantage: With the digital display DM01, different pressure transmitters can be used for various measurement ranges.

The pressure transmitter can be selected and easily exchanged for the required pressure range on site – without tools or parameter setting.

Outstanding measuring qualities, an intuitive operation, as well as an innovative, modular sensor concept characterise the DM01. The battery-powered digital pressure gauge can be used e.g. for controlling pressure courses or calibrating pressure transmitters.

The integrated data logger is able to record pressure and temperature values linearly and cyclically which can be analysed with software BD|LOG.

Preferred areas of use are



Calibrating techniques



Laboratory applications





Plant and Machine Engineering











| Input pressure | | | | | | | | | | | | |
|---|-------|---|------|------|------|------|------|------|------|------|------|----|
| Nominal pressure gauge | [bar] | -1...0 | 0.10 | 0.16 | 0.25 | 0.40 | 0.60 | 1 | 1.6 | 2.5 | 4 | 6 |
| Nominal pressure abs. | [bar] | - | - | - | - | 0.40 | 0.60 | 1 | 1.6 | 2.5 | 4 | 6 |
| Overpressure | [bar] | 5 | 1 | 1 | 1 | 2 | 5 | 5 | 10 | 10 | 17.5 | 35 |
| Burst pressure \geq | [bar] | 7.5 | 1.5 | 1.5 | 1.5 | 3 | 7.5 | 7.5 | 15 | 15 | 25 | 50 |
| Nominal pressure gauge / abs. | [bar] | 10 | 16 | 25 | 40 | 60 | 100 | 160 | 250 | 400 | | |
| Overpressure | [bar] | 35 | 80 | 80 | 105 | 210 | 600 | 600 | 1000 | 1000 | | |
| Burst pressure \geq | [bar] | 50 | 120 | 120 | 210 | 420 | 1000 | 1000 | 1250 | 1250 | | |
| Vacuum resistance | | P _N \geq 1 bar: unlimited vacuum resistant; P _N < 1 bar: on request | | | | | | | | | | |
| Performance | | | | | | | | | | | | |
| Accuracy ¹ | | standard for P _N \geq 0.4 bar: $\leq \pm 0.05\%$ standard for P _N < 0.4 bar: $\leq \pm 0.125\%$ | | | | | | | | | | |
| Long term stability | | $\leq \pm 0.1\%$ FSO / year at reference conditions | | | | | | | | | | |
| Measuring rate / Display | | 1 or 2 measurements per second | | | | | | | | | | |
| ¹ accuracy according to IEC 60770 – minimum value setting (non-linearity, hysteresis, repeatability) - at room temperature 20°C | | | | | | | | | | | | |
| Thermal effects (Offset and Span) | | | | | | | | | | | | |
| Temperature error | | for nominal pressure ranges P _N \leq 160 bar: tolerance band $\leq \pm 0.2\%$ FSO for nominal pressure ranges P _N > 160 bar: tolerance band $\leq \pm 0.75\%$ FSO | | | | | | | | | | |
| compensated range | | 0 ... 50 °C | | | | | | | | | | |
| Permissible temperatures | | | | | | | | | | | | |
| Permissible temperatures | | medium: -10 ... 55 °C environment: -10 ... 55 °C storage: -20 ... 70 °C | | | | | | | | | | |
| Materials | | | | | | | | | | | | |
| Pressure port / housing | | stainless steel 1.4404 (316L) | | | | | | | | | | |
| Display housing | | stainless steel 1.4301 (304) | | | | | | | | | | |
| Seals (media wetted) | | FKM, without (welded version) | | | | | | | | | | |
| Diaphragm | | Stainless steel 1.4435 (316L) | | | | | | | | | | |
| Media wetted parts | | pressure port, seal, diaphragm | | | | | | | | | | |
| Explosion protection | | | | | | | | | | | | |
| AX16-DM01 | | IBExU12ATEX1108 X zone 1: II 2G Ex ia IIC T4 Gb | | | | | | | | | | |
| Miscellaneous | | | | | | | | | | | | |
| Display | | graphic LC display: visible area 55 x 46 mm; (resolution 128x64) figure height 5.5 mm (displaying of pressure value) measured value display: max. 7 digits, depending on pressure range temperature display, time, 100-segment-bargraph, potential input value background illumination: illumination period and intensity adjustable | | | | | | | | | | |
| Temperature display range | | accuracy: ± 2 K resolution: 0,1 K display: -10 ... 55 °C | | | | | | | | | | |
| adjustable units | | [bar], [mbar], [psi], [inHg], [cmHg], [mmHg], [hPa], [kPa], [Mpa], [mH ₂ O], [mmH ₂ O], [inH ₂ O], [kg/cm ²] | | | | | | | | | | |
| Data logger | | recording pressure values and sensor temperature (min, hrs, daily at a defined time) max. 8500 values modes: cyclic, linear measuring value interval adjustable | | | | | | | | | | |
| Current consumption | | without background illumination: approx. 1,3 mA with background illumination: approx. 16 mA (depending on adjusted intensity) standby mode: approx. 1,2 μ A | | | | | | | | | | |
| Supply | | 3x 1,5 V: Duracell Plus battery, DUR087033, AA (LR6) | | | | | | | | | | |
| Ingress protection | | IP 67 | | | | | | | | | | |
| Mounting position ² | | any | | | | | | | | | | |
| Weight | | approx. 680 g | | | | | | | | | | |
| A / D-converter resolution | | 16 bit | | | | | | | | | | |
| Battery life | | standard use: > 2.000 h standby mode: at least 5 years | | | | | | | | | | |
| Load cycles | | > 100 x 10 ⁶ | | | | | | | | | | |
| CE-conformity | | EMC directive: 2014/30/EU pressure equipment directive: 2014/68/EU (Module A) ³ electromagnetic compatibility: according to EN 61326 | | | | | | | | | | |
| ² Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges P _N \leq 1 bar. | | | | | | | | | | | | |
| ³ This directive is only valid for devices with maximum permissible overpressure > 200 bar. | | | | | | | | | | | | |

Dimensions (in mm)

standard

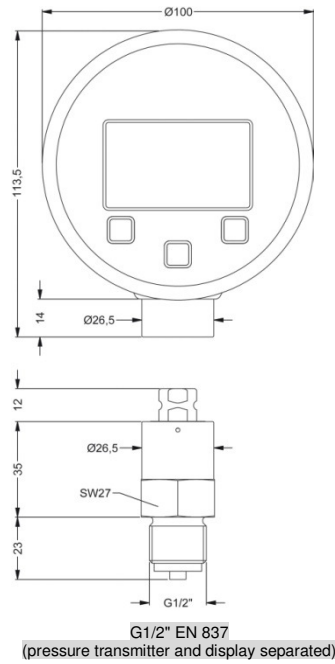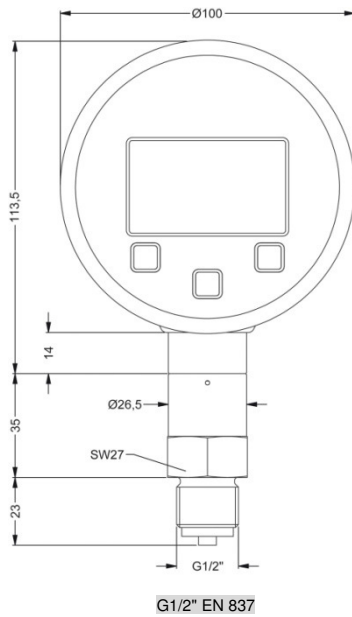

option

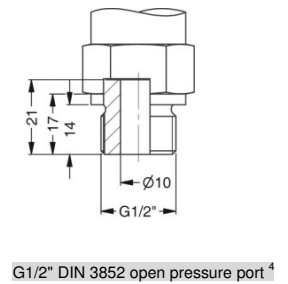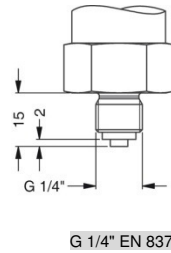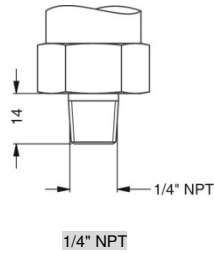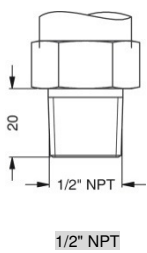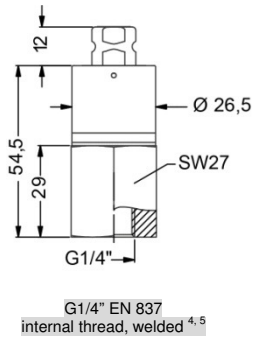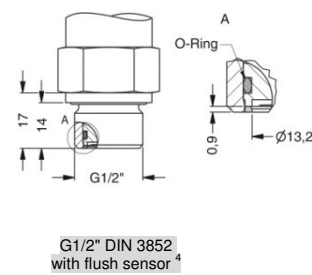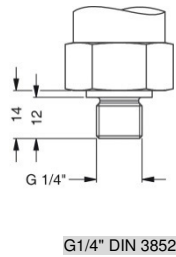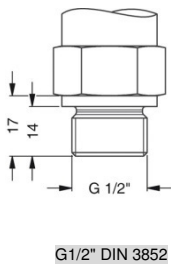

⇒ metrical threads and other variations on request

⁴ only possible for nominal pressure ranges $P_N \leq 40$ bar

⁵ different connection versions with optional adapters possible (see accessories)

Further pressure sensor modules can be combined to the advertisement unity DM01-A21 and DM01-A2E. a overview of available pressure sensor modules and characteristics you will find in the following matrix:

| Pressure sensor module | | | | | | |
|------------------------|-------------------------------------|-------------------------|---------------------------|-----------|---|---------------------|
| Name | Pressure range | Filling fluid | diaphragm | accuracy | Special feature | further information |
| M0 | 0...0,1 bar up to 0...400 bar | silicone oil | stainless steel 1.4435 | 0,05% FSO | very high precision | Data sheet M0 |
| M4 | 0...6 bar up to 0...600 bar | none; welded version | stainless steel 1.4542 | 0,25% FSO | i.a. for oxygen; oil and grease free | Data sheet M4 |
| M7 | 0...0,1 bar up to 0...10 bar | none | ceramic 96% | 0,15% FSO | High overpressure | Data sheet M7 |

Accessories


Accessories are not in scope of supply and have to be ordered separately!

BD|LOG software

Optionally software BD|LOG and an interface cable can be ordered. The software is also available for download on our homepage.

Software:

- display of device information (serial number, pressure and temperature range,...)
- configuration area for all parameters
- download area for recorded data:
 - date
 - pressure measurement
 - temperature measurement
- actual value

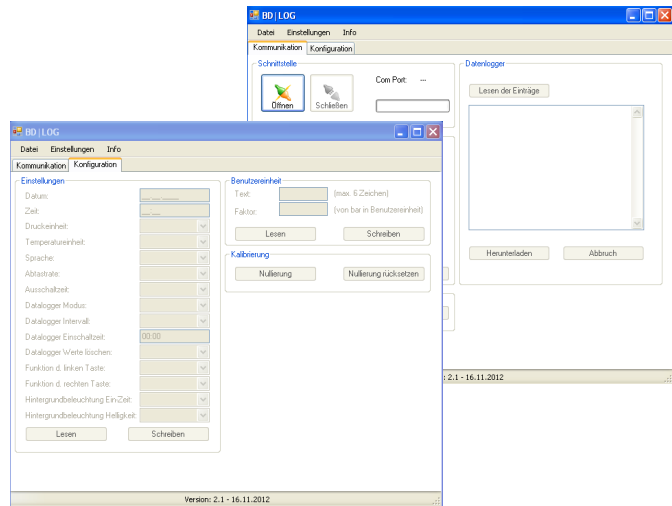



Interface cable with integrated USB converter
l: 1.7 m

Ordering number: ZUSBCD01

Adapter for pressure port G 1/4" EN 837 internal thread, welded

| | | | |
|---|---|--|--|
| <p>G 1/4" EN 837</p> <p>Ordering number: Z5010203</p> | <p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: G 1/4" EN 837</p> | <p>1/4" NPT</p> <p>Ordering number: Z5010204</p> | <p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: 1/4" NPT</p> |
| <p>G 1/2" EN 837</p> <p>Ordering number: Z5010202</p> | <p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: G 1/2" EN 837</p> | <p>1/2" NPT</p> <p>Ordering number: Z5010205</p> | <p>Adapter for pressure sensor module with pressure port G 1/4" EN 837 internal thread, welded</p> <p>external thread: G 1/4" EN 837 external thread: 1/2" NPT</p> |

* others on request


| | | |
|--|---|---|
| <p>Hard-shell service case without accessories</p> <p>Service_Case_DM01</p> |  | <p>Hard shell case.</p> <p>Dimension in mm (L x W x H): 432 X 363 X 138</p> |
| <p>Protective cap</p> <p>Ordering number: Z1002648</p> |  | <p>Rubber protection</p> |
| <p>Additional batteries (only in combination with service case)</p> |  | <p>for IS-version use only</p> <ul style="list-style-type: none"> 3 x 1.5 V / AA Duracell Power Plus |
| <p>Seal set (only in combination with service case)</p> |  | <p>Flat seal copper for mechanical connections according to EN 837</p> |
| <p>PTFE seal tape Nr. 498.505 (only in combination with service case)</p> |  | <p>Seal tape for mechanical connections material: PTFE (Teflon) Temperature range: -200 ... 280 °C</p> |
| <p>Wrench (only in combination with service case)</p> |  | <p>Wrench SW 27</p> |
| <p>Calibration test pump KHP 35</p> <p>Ordering number: 1002637</p> |  | <p>The KHP 35 calibration test pump is used to generate pressure and vacuum for checking, adjusting and calibrating mechanical and electronic pressure measuring instruments by comparative measurements. These pressure tests may be carried out in laboratories, workshop or on site at the measuring point.</p> <p>pressure: 0 ... 35 bar vacuum: 0 ... -0,95 bar weight: ca. 510 g dimension: ca. 220 x 105 x 63 mm</p> |
| <p>Adapter for calibration test pump</p> | | |
| <p>Test unit connection:</p> <p>Adapter to connect the test unit to the calibration test pump.</p> |  | <p>Adapter to connect the test unit to the calibration test pump.</p> <p>external thread: G 1/4" EN 837 to: internal thread: G 1/4" DIN 3852 (No. 5008909) or G 1/2" EN o. DIN (No. 5007896) or 1/4" NPT (No. 5007897) or 1/2" NPT (No. 5007898)</p> <p>others on request</p> |
| <p>Reference unit connection:</p> <p>Adapter to connect the digital gauge to the calibration test pump</p> |  | <p>Adapter to connect the pressure sensor module DM01 to the calibration test pump.</p> <p>external thread: G 1/2" EN 837 to: internal thread: G 1/4" DIN 3852 (No. 5012498) or G 1/2" DIN 3852 (No. 5012519) or 1/4" NPT (No. 5012499) or 1/2" NPT (No. 5012500)</p> <p>others on request</p> |

© 2017 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DM01

1. position: digital display for Precision Digital Pressure Gauge DM01

DM01-



Digital pressure gauge DM01
with communication interface
IS with communication interface

2. position: transmitter for Precision Digital Pressure Gauge DM01

DM01



| Pressure | | M | 0 | K | | | | | | | | | | | | | | |
|---|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|--|---------|
| Input | | M | 0 | L | | | | | | | | | | | | | | |
| gauge absolute | 1 | M | 0 | K | | | | | | | | | | | | | | |
| [bar] | | M | 0 | L | | | | | | | | | | | | | | |
| 0.10 | 1 | | | | 1 | 0 | 0 | 0 | | | | | | | | | | |
| 0.16 | 1 | | | | 1 | 6 | 0 | 0 | | | | | | | | | | |
| 0.25 | 1 | | | | 2 | 5 | 0 | 0 | | | | | | | | | | |
| 0.40 | | | | | 4 | 0 | 0 | 0 | | | | | | | | | | |
| 0.60 | | | | | 6 | 0 | 0 | 0 | | | | | | | | | | |
| 1.0 | | | | | 1 | 0 | 0 | 1 | | | | | | | | | | |
| 1.6 | | | | | 1 | 6 | 0 | 1 | | | | | | | | | | |
| 2.5 | | | | | 2 | 5 | 0 | 1 | | | | | | | | | | |
| 4.0 | | | | | 4 | 0 | 0 | 1 | | | | | | | | | | |
| 6.0 | | | | | 6 | 0 | 0 | 1 | | | | | | | | | | |
| 10 | | | | | 1 | 0 | 0 | 2 | | | | | | | | | | |
| 16 | | | | | 1 | 6 | 0 | 2 | | | | | | | | | | |
| 25 | | | | | 2 | 5 | 0 | 2 | | | | | | | | | | |
| 40 | | | | | 4 | 0 | 0 | 2 | | | | | | | | | | |
| 60 | | | | | 6 | 0 | 0 | 2 | | | | | | | | | | |
| 100 | | | | | 1 | 0 | 0 | 3 | | | | | | | | | | |
| 160 | | | | | 1 | 6 | 0 | 3 | | | | | | | | | | |
| 250 | | | | | 2 | 5 | 0 | 3 | | | | | | | | | | |
| 400 | | | | | 4 | 0 | 0 | 3 | | | | | | | | | | |
| -1 ... 0 | | | | | X | 1 | 0 | 2 | | | | | | | | | | |
| customer | | | | | 9 | 9 | 9 | 9 | | | | | | | | | | consult |
| Version | | | | | | | | | | | | | | | | | | |
| non IS | | | | | | | | 0 | | | | | | | | | | |
| IS | | | | | | | | E | | | | | | | | | | |
| Accuracy | | | | | | | | | | | | | | | | | | |
| standard for $P_N \geq 0.4$ bar | 0.05% | | | | | | | | B | 1 | | | | | | | | |
| standard for $P_N < 0.4$ bar | 0.125% | | | | | | | | B | 2 | | | | | | | | |
| customer | | | | | | | | | 9 | 9 | | | | | | | | consult |
| Mechanical connection | | | | | | | | | | | | | | | | | | |
| G1/2" DIN 3852 | | | | | | | | | 1 | 0 | 0 | | | | | | | |
| G1/2" EN 837 | | | | | | | | | 2 | 0 | 0 | | | | | | | |
| G1/4" DIN 3852 | | | | | | | | | 3 | 0 | 0 | | | | | | | |
| G1/4" EN 837 | | | | | | | | | 4 | 0 | 0 | | | | | | | |
| G1/2" DIN 3852 with flush sensor ² | | | | | | | | | F | 0 | 0 | | | | | | | consult |
| G1/2" DIN 3852 open pressure port ² | | | | | | | | | H | 0 | 0 | | | | | | | |
| 1/2" NPT | | | | | | | | | N | 0 | 0 | | | | | | | |
| 1/4" NPT | | | | | | | | | N | 4 | 0 | | | | | | | |
| G 1/4" EN837 internal thread, welded ^{2,3} | | | | | | | | | J | 0 | 3 | | | | | | | |
| customer | | | | | | | | | 9 | 9 | 9 | | | | | | | consult |
| Seals | | | | | | | | | | | | | | | | | | |
| FKM | | | | | | | | | | | 1 | | | | | | | |
| customer | | | | | | | | | | | 9 | | | | | | | consult |
| Special version | | | | | | | | | | | | | | | | | | |
| standard | | | | | | | | | | | | 0 | 0 | 0 | | | | |
| customer | | | | | | | | | | | | 9 | 9 | 9 | | | | consult |

¹ absolute pressure possible from 0.4 bar

² only possible for $P_N \leq 40$ bar

³ different connection versions with optional adapters possible (see accessories)

ordering example:

device DM01:

position 1: DM 01-A21

position 2: M0K-1001-B1-200-1-000

only display: position 1: DM01-A21

only transmitter: position 2: M0K-1001-B1-200-1-000



Accessories DM01

| Accessories | |
|--|-------------------|
| USB converter (incl. software BD LOG) | ZUSBDC01 |
| service case (without accessories) | Service_Case_DM01 |
| Protective cap | Z1002648 |
| Additional batteries (3 x 1,5 V / AA Duracell Power Plus) ⁴ | 1002798 |
| Seal set ⁴ | 5008886 |
| PTFE seal tape ⁴ | 1002724 |
| wrench ⁴ | 1002722 |
| Calibration test pump (KHP) | 1002637 |
| Adapter for DM01 | |
| G1/4" EN 837 male - G1/4" EN 837 male | Z5010203 |
| G1/4" EN 837 male - G1/2" EN 837 male | Z5010202 |
| G1/4" EN 837 male - 1/4" NPT male | Z5010204 |
| G1/4" EN 837 male - 1/2" NPT male | Z5010205 |
| Adapter for KHP - test unit connection | |
| G1/4" EN 837 m - G1/4" DIN3852 fm | 5008909 |
| G1/4" EN 837 m - G1/2" EN 837/DIN3852 fm | 5007896 |
| G1/4" EN 837 m - 1/4" NPT fm | 5007897 |
| G1/4" EN 837 m - 1/2" NPT fm | 5007898 |
| Adapter for KHP - reference unit connection | |
| G1/2" EN 837 m - G1/4" DIN3852 fm | 5012498 |
| G1/2" EN 837 m - G1/2" DIN3852 fm | 5012519 |
| G1/2" EN 837 m - 1/4" NPT fm | 5012499 |
| G1/2" EN 837 m - 1/2" NPT fm | 5012500 |

⁴ only in combination with service case

© 2017 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

03.04.2017

