

Outdoor Carbon Dioxide Measurements for Demand Controlled Ventilation



The outdoor CO₂ level serves as a baseline for comparison to indoor CO₂ concentration. If the outdoor CO₂ concentration level is 500 ppm, it is rarely lower indoors. Selecting a stable outdoor CO₂ instrument is crucial for monitoring outdoor levels.

Demand controlled ventilation (DCV) helps to maintain good indoor air quality while optimizing energy consumption. In a typical set-up only indoor CO₂ levels are measured. Ventilation controls are operated based on the assumed outdoor CO₂ level of 400 ppm. However, locally elevated CO₂ levels occur due to CO₂ emissions from transportation, energy production and industrial manufacturing.

Ventilation guidelines, such as ASHRAE, recommend indoor CO₂ levels not to exceed the surrounding

outdoor concentration by 600 ppm. Also, LEED guidelines suggest providing an alarm when the indoor CO₂ level exceeds the outdoor level by 530 ppm, or 1,000 ppm absolute. Reliable correlation between indoor and outdoor CO₂ levels can only be achieved by measuring both.


Measuring CO₂ Outdoors

Knowing outdoor CO₂ levels helps when assessing indoor conditions. During periods when the outdoor CO₂ level exceeds 400 ppm the space

may be over-ventilated. In order to truly optimize energy consumption, outdoor CO₂ concentration should be measured. The real time differential between indoor and outdoor CO₂ concentration can be used as a control parameter.

As there are large diurnal and seasonal variations in outdoor temperature, the outdoor CO₂ instrument should automatically compensate for temperature variations.

Outdoor CO₂ sensors need to operate in varying conditions. They have to tolerate rain, hail, snow, solar radiation, dirt and dust, as well as temperature extremes between -40 and +60 °C (-40 ... +140 °F).

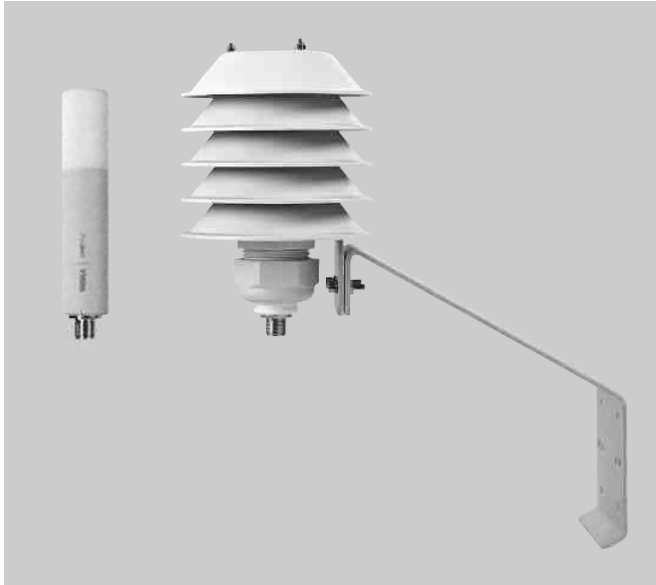

Radiation shield DTR250A (right) with GMP252 probe

Vaisala Radiation Shield DTR250 Series:

- GMP252 inside the radiation shield is an ideal solution for dynamically measuring outdoor CO₂ levels
- Meets the specifications of Section 6.2.7 in the ASHRAE Green Buildings Standard 62.1
- Two options: DTR250 for support bars and DTR250A for pole masts

GMP252 probe features:

- Wide operating temperature range of -40 ... +60 °C (-40 ... +140 °F)
- Integrated temperature sensor for continuous compensation
- Sensor head heated to prevent condensation
- Traceable calibration (certificate included)



GMP343 for outdoor measurements

Vaisala CARBOCAP® Carbon Dioxide Probe GMP343 for Outdoor Measurements:

Vaisala CARBOCAP® Carbon Dioxide Probe GMP343 has been specially designed for high accuracy outdoor measurements:

- Accuracy of ±(3 ppm + 1 % of reading) at 25 °C (77 °F)
- IP65/IP66 housing classification for harsh environments
- Operating temperature range -40 ... +60 °C (-40 ... +140 °F)
- Low maintenance need due to highly stable CARBOCAP® sensor with built-in reference measurement
- Automatic compensation of CO₂ readings for temperature variations
- Possibility to compensate for pressure (site elevation)

VAISALA

Please contact us at
www.vaisala.com/requestinfo



Scan the code for
more information

Ref. B211381EN-B ©Vaisala 2018
This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

www.vaisala.com