

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH; 175 W, 250 W, 400 W MH.

Mogul Base. For use with threaded metal conduit.

NEC:

Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
Marine Type Electric Fixtures
Outside Type (Salt Water)

CEC:

Class I, Division 1 and 2, Groups B, C, D
Class I, Zone 1 and 2; IIB, IIA
Class II, Division 1, Groups E, F, G
Class II, Division 2, Groups F, G
Class III

CEC:


CSA Type 4X
Exd IIB, Zone 1

Applications

- Ideal for use in chemical and petrochemical plants, such as manufacturers of plastics, paints and thinners; in refineries; and in other process areas where ignitable vapors, dust, moisture and corrosive elements may be present.
- Suitable for use in wet locations.

Features

- Fixtures operate safely in high ambient temperatures. For example, in Class I areas the 150 W HPS fixture operates at a maximum temperature of +120 °C (+248 °F) in a +65 °C (+149 °F) ambient [+100 °C (+212 °F) temperature in a +40 °C (+104 °F) ambient].
- Arrangement of heat-producing components results in more efficient heat dissipation for cooler fixture operation.
- “Wireless” design. Threading of fixture unit onto mounting hood makes electrical connection. Only wiring required is attaching two wires to connection block in mounting hood.
- Connection block is easily wired: (a) loosen two screws, (b) make wire connections and (c) re-position connection block.
- Safe, easy servicing without disconnecting any wiring. “Wireless” fixture unit easily threads off mounting hood for convenient servicing or for immediate replacement with a “stand-by” unit.
- Acme double-lead threads speed installation and fixture removal from mounting hood — only half as many turns are required as for single-lead threads. The threads do not stick or gall, eliminating the troublesome problems often encountered with single lead threads during fixture unit removal.
- All threaded joints are flame-tight.
- Integrally ballasted HID lighting fixtures; separate ballasts not required.
- Factory sealed. External seals not required.
- Strategic location of lamp socket in combination with the interior prism design of the glass globe provides optimum light distribution and control.
- Superior corrosion resistance, with epoxy powder coat finish.
- Porcelain socket with nickel-plated phosphor bronze screw shell. Assures long trouble-free operation in high ambient areas.
- Choice of mountings: pendant, ceiling, bracket and stanchion.
- Fiberglass-reinforced polyester reflectors, in standard dome, deep dome or 30° angle, are ideal in installations where luminaire is subject to exceptionally severe corrosive atmospheres. The high bay aluminum reflector is indicated in installations where mounting height from work plane ranges from 20 feet/6 meters and higher.
- Optional guards protect globes from damage. Secured to fixture with three screws.
- Light sources: high pressure sodium, pulse start metal halide or metal halide. HPS is excellent where long lamp life is required. HPS provides high lumens per watt and is less expensive to operate. PSMH/MH is desirable where colors of illuminated areas must be close to natural. PSMH/MH provides better color rendition, increased lumen output, longer lamp life, and faster restrike after momentary power interruption.
- A wide range of ballasts and voltages are available for both domestic and export applications.
- Ballasts operate at low temperatures – PSMH: -29 °C (-20 °F); HPS: -40 °C (-40 °F); MH: -35 °C (-31 °F).

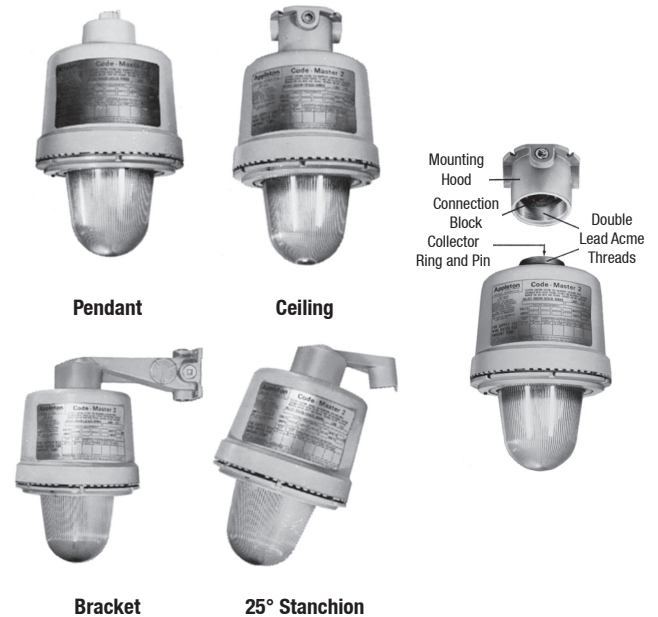

- 50 W through 150 W high pressure sodium ballasts are high reactance, high power factor type.

Standard Materials

- Ballast bodies and guards: copperfree (4/10 of 1% max.) aluminum
- Pendant mounting hoods: diecast copperfree (4/10 of 1% max.) aluminum
- Ceiling, bracket and stanchion mounting hoods: sand cast copperfree (4/10 of 1% max.) aluminum
- Reflectors: aluminum or fiberglass reinforced polyester

Standard Finishes

- Ballast bodies, guards and mounting hoods: epoxy powder coat finish, electrostatically applied for complete, uniform corrosion protection

Options

- Fuses for field installation can be ordered by catalog number from fuse kit table.
- Quartz Auxiliary Emergency Lamp for PSMH/MH and HPS fixtures. Relay switch installed in fixture. Add suffix **-E** to fixture catalog number. ①
- Hot Restrike Option available for 50 W through 150 W HPS only. Add suffix **-R**.
- Smart Starter Option available for 50 W through 400 W HPS and PSMH/MH. Add suffix **-S**.

NEC/CEC Certifications and Compliances

- UL Standard: UL 1598, UL 844
- UL Listed: E10444
- CSA Standard: C22.2 No. 250, C22.2 No. 137
- CSA Certified: 025428

① Quartz Auxiliary Emergency Lamps for PSMH/MH and HPS fixtures are for ordinary locations only.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH; 175 W, 250 W, 400 W MH.

Mogul Base. For use with threaded metal conduit.

NEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1

Order using catalog numbering guide below or select catalog number from tables on following pages.

Catalog Numbering Guide

| | | | | | | | |
|--|--|--|--|---|--|---|---|
| <p>C</p> <p>Series: C - Code•Master 2 HID</p> | <p>L</p> <p>Lamp Type: L - High Pressure Sodium (HPS) P - Pulse Start Metal Halide (PSMH) H - Metal Halide (MH) ②</p> | <p>P</p> <p>Mounting: P - Rigid Pendant C - Ceiling S - Angled Stanchion (25°) W - Wall</p> | <p>40</p> <p>Wattage: 50 - 50 W HPS 70 - 70 W HPS 10 - 100 W HPS/ MH ② 15 - 150 W HPS/ MH ② 17 - 175 W PSMH/ MH ② 25 - 250 W PSMH/ MH ② 40 - 400 W PSMH/ MH ②</p> | <p>75</p> <p>Hub Size: 75 - 3/4" NPT 10 - 1" NPT 15 - 1-1/2" NPT Stanchion with 1-1/4" Reducer</p> | <p>G</p> <p>Guard Options: G - Globe Guard N - No Guard</p> | <p>MT</p> <p>Voltage: ① MT- 120, 208, 240, 277 V, 60 Hz, CWA TT - 120, 277, 347 V, 60 Hz, CWA 48 - 480 V, 60 Hz, CWA (NEC Only) XP - 220-240 V, 50 Hz, CWA C7 - 600 V 60 Hz, CWI</p> | <p>E</p> <p>Options: C - Safety Cable Adapted E - Emergency Quartz F - Fuse (Specify Voltage) R - Hot Restrike Ignitor (HPS Only) S - Smart Starter (HPS Only)</p> |
|--|--|--|--|---|--|---|---|

Voltages

| Lamp Type | Lamp Watts | Voltage Suffixes | | | | |
|-----------|------------|------------------|----|----|----|----|
| | | MT | TT | 48 | XP | C7 |
| HPS | 50 | X | X | X | - | - |
| HPS | 70 | X | X | X | - | - |
| HPS | 100 | X | X | X | X | - |
| HPS | 150 | X | X | X | X | X |
| HPS | 250 | X | X | X | X | X |
| HPS | 400 | X | X | X | X | X |
| PSMH | 175 | X | X | X | - | - |
| PSMH | 250 | X | X | X | - | - |
| PSMH | 400 | X | X | X | - | - |
| MH ② | 100 | X | X | - | - | - |
| MH ② | 150 | X | X | - | - | - |
| MH ② | 175 | X | X | - | X | X |
| MH ② | 250 | X | X | - | X | X |
| MH ② | 400 | X | X | - | X | X |

Voltages:
MT - 120/208/240/277 V 60 Hz, CWA
TT - 120/277/347 V 60 Hz, CWA
48 - 480 V, 60 Hz, CWA (NEC Only)
XP - 220-240 V, 50 Hz, CWA
C7 - 600 V, 60 Hz, CWI

Refer to "Mounting Hoods and Ballast" page for available Voltage Configuration.

① Other voltages available. Contact your local sales representative.

② Mercury vapor and metal halide luminaires are not available for purchase within the United States. Please check with your countries governing legislation regarding allowable lamp types before ordering.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof. Groups C and D Applications

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH.

Mogul Base. For use with threaded metal conduit.

NEC:

Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:

Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:

CSA Type 4X
 Exd IIB, Zone 1

Classified Area Suitability of Code•Master 2 Series HID Fixtures — Suitability includes use of reflector

| Lamp Type | Lamp Watts | Supply Wire °C (°F) | Ambient Temp °C (°F) | Class I, Division 1 and 2 With Globe or with Globe and Reflector UL/NEC/CEC Temp. Ident. No. | | | Class II, Division 1 and 2 With Globe or with Globe and Reflector UL/NEC/CEC Temp. Ident. No. ① | |
|--------------------------|------------|---------------------|----------------------|--|------------|------------|---|---------|
| | | | | Nameplate Marking | NEC Groups | CEC Groups | Nameplate Marking | Groups |
| High Pressure Sodium | 50 | 60 (140) | 40 (104) | T6 | C,D | B, C, D | T4 | E,F,G |
| | 50 | 75 (167) | 55 (131) | T5 | C,D | B, C, D | — | — |
| | 50 | 85 (185) | 65 (149) | T5 | C,D | B, C, D | — | — |
| | 70 | 60 (140) | 40 (104) | T6 | C,D | B, C, D | T4 | E,F,G |
| | 70 | 75 (167) | 55 (131) | T5 | C,D | B, C, D | — | — |
| | 70 | 85 (185) | 65 (149) | T5 | C,D | B, C, D | — | — |
| | 100 | 60 (140) | 40 (104) | T5 | C,D | B, C, D | T4 | E,F,G |
| | 100 | 75 (167) | 55 (131) | T5 | C,D | B, C, D | — | — |
| | 100 | 85 (185) | 65 (149) | T4A | C,D | B, C, D | — | — |
| | 150 | 60 (140) | 40 (104) | T5 | C,D | B, C, D | T3A | E,F |
| | 150 | 75 (167) | 55 (131) | T4A | C,D | B, C, D | T3 | — |
| | 250 | 75 (167) | 40 (104) | T3C | C,D | B, C, D | — | — |
| | 250 | 75 (167) | 55 (131) | T3C | C,D | B, C, D | — | — |
| | 400 | 85 (185) | 40 (104) | T3C | C,D | B, C, D | — | — |
| Pulse Start Metal Halide | 175 | 75 (167) | 40 (104) | T4 | C,D | B, C, D | T3C | E,F,G |
| | 250 | 75 (167) | 40 (104) | T4 | C,D | B, C, D | T3A | E,F |
| | 400 | 75 (167) | 40 (104) | T3C | C,D | B, C, D | — | — |
| Metal Halide ② | 175 | 75 (167) | 40 (104) | T4 | — | B, C, D | T3C | E, F, G |
| | 250 | 75 (167) | 40 (104) | T4 | — | B, C, D | T3A | E, F |
| | 400 | 75 (167) | 40 (104) | T3C | — | B, C, D | — | — |

“T” Numbers Represent the Maximum Surface Temperature for Class I, Division 1 Locations and Maximum Surface Temperature Under Dust Blanket for Class II, Division 1 Locations.

| “T” Number | T1 | 350 | 325 | T2 | T2A | T2B | T2C | T2D | T3 | T3A | T3B | T3C | T4 | T4A | T5 | T6 |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------|-----|
| Temp. Range (°C) | 351-450 | 326-350 | 301-325 | 281-300 | 261-280 | 231-260 | 216-230 | 201-215 | 181-200 | 166-180 | 161-165 | 136-160 | 121-135 | 101-120 | 86-100 | 85 |
| Temp. Range (°F) | 664-842 | 619-662 | 574-617 | 538-572 | 502-536 | 448-500 | 421-446 | 394-419 | 358-392 | 331-356 | 322-329 | 277-320 | 250-275 | 214-248 | 187-12 | 185 |

NOTE: The maximum operating temperature of the fixture must not exceed the ignition temperature of the gas, vapor or dust to be encountered per the National Electrical Code and the Canadian Electrical Code.

① Applies to Code•Master 2 only.

② Mercury vapor and metal halide luminaires are not available for purchase within the United States. Please check with your countries governing legislation regarding allowable lamp types before ordering.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH; 175 W, 250 W, 400 W MH.






Mogul Base. For use with threaded metal conduit.

NEC:
 Class I, Division 1 and 2, Groups C, D ♦
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:
 Class I, Division 1 and 2, Groups B, C, D ♦
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1

Mounting Hoods

| | Hub Size (Inches) | Catalog Number |
|---|---|----------------|
| Pendant — One Hub | | |
|  | 3/4 | CAP-75 |
| | 1 | CAP-100 |
| Ceiling — Four Hubs, Three Close-Up Plugs | | |
|  | 3/4 | CAC-75 |
| | 1 | CAC-100 |
| Bracket — Four Hubs, Three Close-Up Plugs | | |
|  | 3/4 | CALB-75 |
| | 1 | CALB-100 |
| 25° Stanchion — One Hub | | |
|  | 1-1/4 or 1-1/2 | CAS-150 |
| | 1-1/2" Tapped hub furnished with 1-1/2" to 1-1/4" reducer | |
| Mounting Adapter with Connection Block | | |
|  | Permits use of existing A-51 mounting hoods (AAC Ceiling or AALB Bracket) with the new Code•Master 2 Fixture Unit. After removing existing fixture unit and adapter, screw in the new CMAD-1 Adapter. Then thread new fixture unit into the CMAD-1. | |
| | CMAD-1 | |

Fixture Units

Ballast body with globe. Indicate voltage desired by adding voltage suffix to fixture unit catalog number listed below.

| Type | Lamp Watts | Fixture Unit Number | Add Voltage Suffixes ①② | | |
|---|------------|---------------------|-------------------------|-------------|-------|
| | | | 120/208/240/277 | 120/277/347 | 480 V |
| High Pressure Sodium High Power Factor (Min. P.F. 90%) | 50 | CMBL50 | MT | TT | — |
| | 70 | CMBL70 | MT | TT | 48 |
| | 100 | CMBL100 | MT | TT | 48 |
| | 150 | CMBL150 | MT | TT | 48 |
| | 250 | CMBL250 | MT | TT | 48 |
| Pulse Start Metal Halide Constant Wattage (Min. P.F. 90%) | 400 | CMBL400 | MT | TT | 48 |
| | 175 | CMBP175 | MT | TT | 48 |
| | 250 | CMBP250 | MT | TT | 48 |
| Metal Halide ③ Constant Wattage (Min. P.F. 90%) | 400 | CMBP400 | MT | TT | 48 |
| | 175 | CMBH175 | MT | TT | C6 |
| Metal Halide ③ Constant Wattage (Min. P.F. 90%) | 250 | CMBH250 | MT | TT | C6 |
| | 400 | CMBH400 | MT | TT | C6 |

① Change voltage suffix -TT to -MT for 120/208/240/277 V, or -C7 for 600 V. These voltage suffixes have CSA Certification only. Consult factory for other available voltages.

② See "Options" in the "Catalog Numbering Guide" for optional accessories.

③ Mercury vapor and metal halide luminaires are not available for purchase within the United States. Please check with your countries governing legislation regarding allowable lamp types before ordering.

♦ Shaded items are suitable for Class I, Group D ONLY.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH; 175 W, 250 W, 400 W MH.

Mogul Base. For use with threaded metal conduit.

NEC:






Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:

Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:

CSA Type 4X
 Exd IIB, Zone 1

| | Description | Catalog Number |
|---|--|----------------------------------|
| Polyester Reflectors — 50 W - 400 W | | |
|  <p>Standard and Deep Dome</p> <p>30° Angle</p> | Standard Dome | CMR-4ST |
| | Deep Dome ① | CMR-4DD |
| | 30° Angle | CMR-4AN |
| Aluminum High Bay Reflectors — 50 W - 400 W | | |
|  | | CMR-4HB |
| Prismatic Glass Globes — 50 W - 400 W | | |
|  | 50, 70, 100, 150 W HPS; 175, 250 W PSMH; 175, 250 W MH 250, 400 W HPS; 400 W PSMH; 400 W MH | CGL-250 CGL-400 |
| Aluminum Guards — 50 W - 400 W | | |
|  | 50, 70, 100, 150 W HPS; 175, 250 W PSMH; 175, 250 W MH 250, 400 W HPS; 400 W PSMH; 400 W MH | CGU2 CGU4 |
| Replacement Sockets — 50 W - 400 W (Mogul Base) | | |
|  <p>VPT-7</p> | For all Code•Master 2 HID fixtures | CMS-400 |
| | Connection Block – 50 W through 400 W | |
| | For all Code•Master 2 HID fixtures | VPT-7 |
| Quartz Emergency Option for Pulse Start Metal Halide and High Pressure Sodium Fixtures | | |
| Fixtures can be supplied with a socket to accept a 150 W or 250 W, 120 V quartz lamp (lamp not included). This D.C. bayonet base socket is in addition to the standard lamp socket, independent of the lighting fixture voltage. | | |
| | | Add suffix -E |
| HPS Hot Restrike | | |
| Restrikes HPS lamp immediately when power is restored after a momentary power interruption. | | |
| Optional for fixture watts of 50, 70, 100 or 150 (HPS only) | | |
| | | Add suffix -R |
| HPS Smart Starter | | |
| Smart Starter is for HPS fixtures only. Incorporates a 1-1/2-minute timer and performs as a conventional starter to normally start lamp. Removes itself from circuit if lamp burns out or is removed from socket. Eliminates starter failures caused by prolonged operation with cycling or failing lamps and simplifies finding their location which reduces maintenance and repair costs. | | |
| Optional for all HPS fixtures. | | |
| | | Add suffix -S |

① Fixtures when used with Deep Dome Refletors are NOT UL Listed.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH; 175 W, 250 W, 400 W MH.

Mogul Base. For use with threaded metal conduit.

NEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1

HID/AREA: NEC/CEC EXPLOSIONPROOF

APPLETON™

| Lamp | Watts | Volts | High Pressure Sodium ① | | Ballast Amps Pulse Start Metal Halide Super CWA | | Metal Halide CWA | | Fuse Quantity Required | Fuse Kit Catalog Number | | |
|------|-------|-------|------------------------|-----------|---|-----------|------------------|-----------|------------------------|-------------------------|-------|-------|
| | | | Start | Operating | Start | Operating | Start | Operating | | HPS | PSMH | MH ② |
| 50 | 120 | | 0.58 | 0.58 | — | — | — | — | 1 | CF-5 | — | — |
| | 208 | | 0.35 | 0.33 | — | — | — | — | 2 | CF-3 | — | — |
| | 240 | | 0.31 | 0.29 | — | — | — | — | 2 | CF-3 | — | — |
| | 277 | | 0.25 | 0.25 | — | — | — | — | 1 | CF-2 | — | — |
| | 347 | | — | — | — | — | — | — | — | — | — | — |
| | 480 | | — | — | — | — | — | — | — | — | — | — |
| 70 | 120 | | 0.90 | 0.82 | — | — | — | — | 1 | CF-5 | — | — |
| | 208 | | 0.50 | 0.48 | — | — | — | — | 2 | CF-3 | — | — |
| | 240 | | 0.44 | 0.44 | — | — | — | — | 2 | CF-3 | — | — |
| | 277 | | 0.35 | 0.36 | — | — | — | — | 1 | CF-2 | — | — |
| | 347 | | 0.30 | 0.30 | — | — | — | — | 1 | CF-2 | — | — |
| | 480 | | 0.21 | 0.21 | — | — | — | — | 2 | CF-2 | — | — |
| 100 | 120 | | 1.30 | 1.15 | — | — | 1.20 | 1.15 | 1 | CF-8 | — | CF-6 |
| | 208 | | 0.76 | 0.67 | — | — | 0.70 | 0.70 | 2 | CF-5 | — | CF-4 |
| | 240 | | 0.66 | 0.58 | — | — | 0.61 | 0.58 | 2 | CF-5 | — | CF-3 |
| | 277 | | 0.60 | 0.50 | — | — | 0.55 | 0.50 | 1 | CF-3 | — | CF-3 |
| | 347 | | 0.45 | 0.39 | — | — | 0.40 | 0.40 | 1 | CF-3 | — | CF-2 |
| | 480 | | 0.33 | 0.29 | — | — | — | — | 2 | CF-3 | — | — |
| 150 | 120 | | 2.00 | 1.66 | — | — | 1.75 | 1.60 | 1 | CF-10 | — | CF-6 |
| | 208 | | 1.16 | 0.96 | — | — | 1.30 | 1.00 | 2 | CF-5 | — | CF-4 |
| | 240 | | 1.00 | 0.83 | — | — | 0.85 | 0.80 | 2 | CF-5 | — | CF-3 |
| | 277 | | 0.88 | 0.75 | — | — | 0.77 | 0.70 | 1 | CF-5 | — | CF-3 |
| | 347 | | 0.52 | 0.56 | — | — | — | — | 1 | CF-5 | — | — |
| | 480 | | 0.50 | 0.44 | — | — | — | — | 2 | CF-3 | — | — |
| 175 | 120 | | — | — | 0.80 | 1.80 | 1.30 | 1.80 | 1 | — | CF-5 | CF-5 |
| | 208 | | — | — | 0.50 | 1.00 | 0.75 | 1.10 | 2 | — | CF-3 | CF-3 |
| | 240 | | — | — | 0.40 | 0.90 | 0.65 | 0.90 | 2 | — | CF-3 | CF-3 |
| | 277 | | — | — | 0.40 | 0.80 | 0.55 | 0.80 | 1 | — | CF-2 | CF-2 |
| | 347 | | — | — | 0.25 | 0.65 | 0.50 | 0.65 | 1 | — | CF-2 | CF-2 |
| | 480 | | — | — | 0.15 | 0.45 | — | — | 2 | — | CF-3 | — |
| 250 | 120 | | 1.75 | 2.70 | 2.00 | 2.30 | 1.20 | 2.60 | 1 | CF-8 | CF-10 | CF-8 |
| | 208 | | 1.00 | 1.50 | 1.10 | 1.40 | 0.65 | 1.50 | 2 | CF-5 | CF-6 | CF-5 |
| | 240 | | 0.85 | 1.30 | 1.00 | 1.20 | 0.60 | 1.30 | 2 | CF-5 | CF-6 | CF-5 |
| | 277 | | 0.75 | 1.15 | 0.80 | 1.00 | 0.50 | 1.12 | 1 | CF-5 | CF-5 | CF-3 |
| | 347 | | 0.60 | 0.93 | 0.62 | 0.90 | 0.80 | 0.90 | 1 | CF-5 | CF-3 | CF-3 |
| | 480 | | 0.40 | 0.65 | 0.30 | 0.60 | — | — | 2 | CF-2 | CF-3 | — |
| 400 | 120 | | 3.10 | 3.90 | 3.10 | 3.70 | 3.25 | 4.00 | 1 | CF-15 | CF-12 | CF-10 |
| | 208 | | 1.80 | 2.25 | 1.70 | 2.10 | 1.90 | 2.30 | 2 | CF-8 | CF-6 | CF-8 |
| | 240 | | 1.60 | 1.95 | 1.50 | 1.90 | 1.65 | 2.00 | 2 | CF-5 | CF-6 | CF-5 |
| | 277 | | 1.35 | 1.70 | 1.30 | 1.60 | 1.40 | 1.75 | 1 | CF-5 | CF-5 | CF-5 |
| | 347 | | 1.00 | 1.32 | 1.10 | 1.35 | 1.20 | 1.40 | 1 | CF-5 | CF-5 | CF-5 |
| | 480 | | 0.80 | 1.00 | 0.80 | 0.95 | — | — | 2 | CF-5 | CF-3 | — |

Fuse Kit includes fuse, fuse holder and necessary hardware for field installation. Mounts easily in ballast body with one screw. Order one fuse for 120 and 277 V, and 2 fuses for 208, 240 and 480 V. **CF-2** = 2 amp; **CF-3** = 3 amp; **CF-5** = 5 amp; **CF-6** = 6 amp; **CF-8** = 8 amp; **CF-10** = 10 amp; **CF-12** = 12 amp

① 50 through 150 W HPS have H.P.F. High Reactance ballasts; 250 W and 400 W HPS have CWA ballasts.

② Mercury vapor and metal halide luminaires are not available for purchase within the United States. Please check with your countries governing legislation regarding allowable lamp types before ordering.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

Integrally Ballasted. 50 W, 70 W, 100 W, 150 W, 250 W, 400 W HPS; 175 W, 250 W, 400 W PSMH; 175 W, 250 W, 400 W MH.

Mogul Base. For use with threaded metal conduit.

NEC:

Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)


CEC:

Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:

CSA Type 4X
 Exd IIB, Zone 1

Dimensions in Millimeters (Inches)

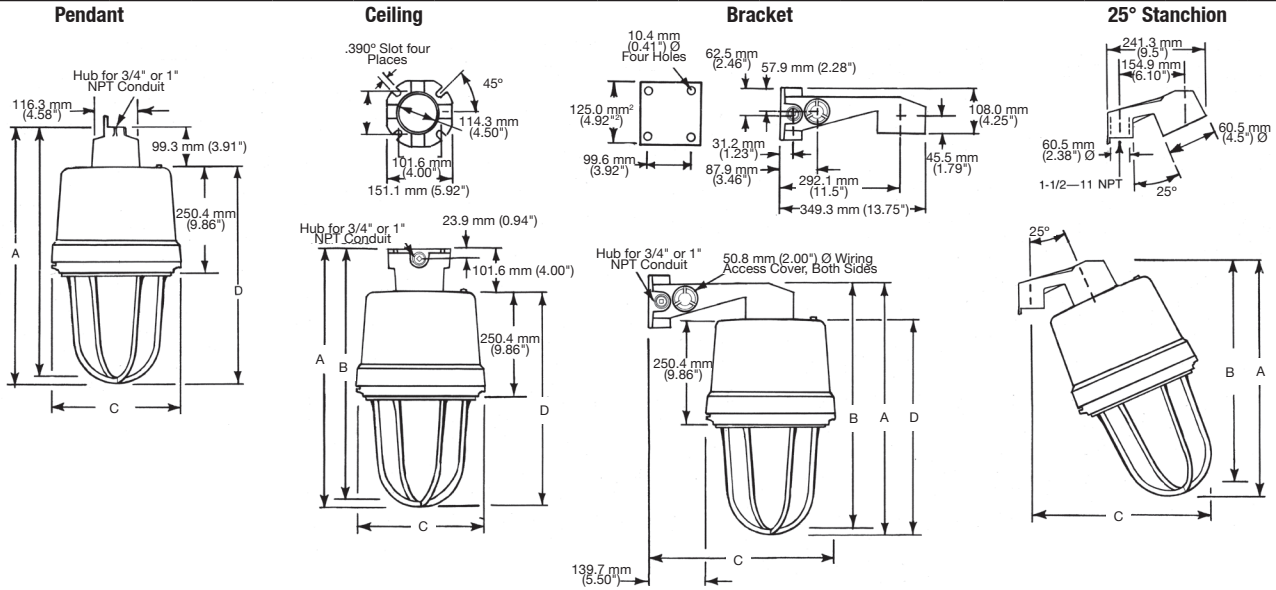

| | Pendant | | | | Ceiling | | | | Bracket | | | 25° Stanchion | | | |
|-------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| | A | B | C | D | A | B | C | D | A | B | C | D | A | B | C |
| 50-250 W ① | 546.1 (21.50) | 520.7 (20.50) | 304.8 (12.00) | 447.3 (17.61) | 548.9 (21.61) | 523.5 (20.61) | 304.8 (12.00) | 447.3 (17.61) | 555.2 (21.86) | 529.8 (20.86) | 444.5 (17.50) | 447.3 (17.61) | 495.3 (19.50) | 475.0 (18.70) | 406.4 (16.00) |
| 250-400 W ② | 522.3 (24.50) | 596.9 (23.50) | 304.8 (12.00) | 507.1 (20.36) | 618.7 (24.36) | 507.1 (20.36) | 304.8 (12.00) | 507.1 (20.36) | 625.1 (24.61) | 599.7 (23.61) | 444.5 (17.50) | 507.1 (20.36) | 563.9 (22.20) | 538.5 (21.20) | 444.5 (17.50) |


Fixture and Accessory Weights kg (lb)

| Fixture Size | Fixture Weight | Reflector Weight | Guard Weight |
|----------------------|----------------|------------------|--------------|
| 50 W through 175 W | 14.5 (31.97) | 1.4 (3.09) | 0.5 (1.10) |
| 250 W PSMH/MH | 16.9 (37.26) | 1.4 (3.09) | 0.5 (1.10) |
| 250 W HPS | 18.1 (39.90) | 1.4 (3.09) | 0.9 (1.98) |
| 400 W PSMH, 400 W MH | 20.4 (44.97) | 1.4 (3.09) | 0.9 (1.98) |

Mounting Hood Weights kgs (lbs)

| Pendant | Ceiling | Bracket | Stanchion |
|---------|---------|---------|-----------|
| 0.9 (2) | 1.8 (4) | 2.7 (6) | 0.9 (2) |

Reflector Dimensions in Millimeters (Inches)

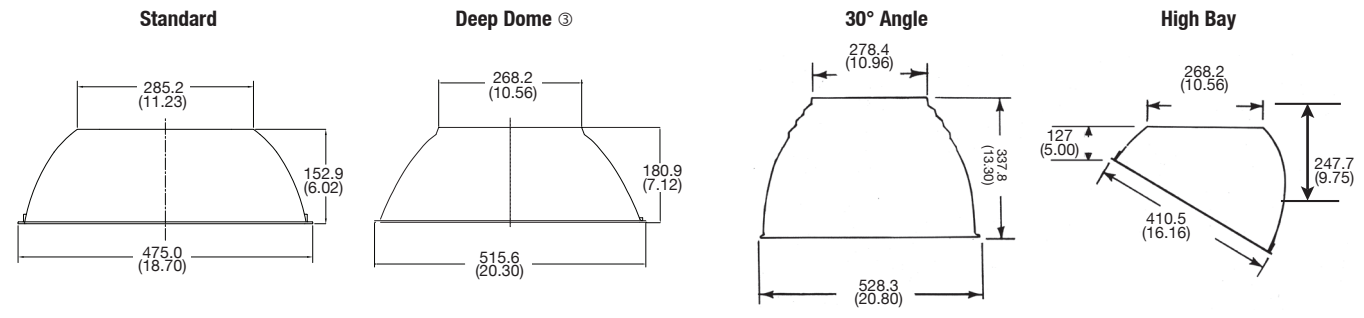

① 50, 70, 100 and 150 W HPS; 175 W PSMH; 175 and 250 W MH.

② 250 and 400 W HPS; 250, and 400 W PSMH; 400 W MH.

③ Fixtures when used with Deep Dome Reflectors are NOT UL Listed.

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

* Photometric data is based on a 100-watt clear HPS lamp (9,500 lumens). For candlepower values of fixtures with other lamps, use the following multipliers: 50 W HPS – 0.42 (4,000 lumens); 70 W HPS – 0.61 (6,300 lumens); and 150 W HPS – 1.68 (16,000 lumens).

NEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1


Photometric Data

Total Luminaire Efficiency = 76.4%

CIE Type – Semi-Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 2.66 |
| 90-270 | 2.66 |
| Diagonal | 2.84 |

| Zone | Lumens |
|---------|---------|
| 0-10 | 29.80 |
| 10-20 | 106.54 |
| 20-30 | 202.92 |
| 30-40 | 318.52 |
| 40-50 | 468.31 |
| 50-60 | 670.49 |
| 60-70 | 866.67 |
| 70-80 | 976.61 |
| 80-90 | 1038.41 |
| 90-100 | 1042.18 |
| 100-110 | 927.00 |
| 110-120 | 551.82 |
| 120-130 | 51.82 |
| 130-140 | 2.51 |
| 140-150 | 0.25 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

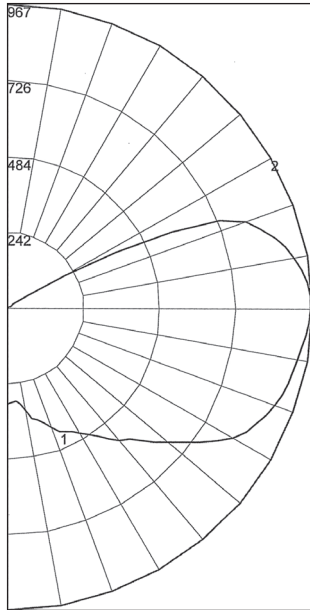

REPORT NUMBER: **CL10G**

Lamps: 100 W High Pressure Sodium with Globe only

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| % Ceiling Rcc | % Walls | Rw | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
|---------------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| | | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | |
| 0 | | | 84 | 84 | 84 | 84 | 79 | 79 | 79 | 79 | 70 | 70 | 70 | 61 | 61 | 61 | 53 | 53 | 53 | 49 | | | |
| 1 | | | 72 | 66 | 61 | 56 | 66 | 61 | 57 | 52 | 53 | 49 | 46 | 45 | 42 | 40 | 38 | 36 | 34 | 30 | | | |
| 2 | | | 63 | 54 | 47 | 41 | 58 | 51 | 44 | 39 | 43 | 38 | 34 | 37 | 32 | 29 | 30 | 27 | 24 | 21 | | | |
| 3 | | | 56 | 46 | 38 | 32 | 52 | 43 | 36 | 30 | 36 | 31 | 26 | 31 | 26 | 22 | 25 | 22 | 18 | 15 | | | |
| 4 | | | 51 | 40 | 32 | 26 | 47 | 37 | 30 | 24 | 31 | 25 | 21 | 26 | 22 | 18 | 22 | 18 | 14 | 12 | | | |
| 5 | | | 46 | 35 | 27 | 21 | 42 | 32 | 25 | 20 | 28 | 22 | 17 | 23 | 18 | 14 | 19 | 15 | 12 | 9 | | | |
| 6 | | | 42 | 31 | 23 | 18 | 39 | 29 | 22 | 17 | 24 | 19 | 14 | 21 | 16 | 12 | 17 | 13 | 10 | 7 | | | |
| 7 | | | 39 | 28 | 20 | 15 | 36 | 26 | 19 | 14 | 22 | 16 | 12 | 18 | 14 | 10 | 15 | 11 | 8 | 6 | | | |
| 8 | | | 36 | 25 | 18 | 13 | 33 | 23 | 17 | 12 | 20 | 14 | 10 | 17 | 12 | 9 | 14 | 10 | 7 | 5 | | | |
| 9 | | | 33 | 23 | 16 | 11 | 31 | 21 | 15 | 11 | 18 | 13 | 9 | 15 | 11 | 8 | 13 | 9 | 6 | 4 | | | |
| 10 | | | 31 | 21 | 14 | 10 | 29 | 19 | 13 | 9 | 17 | 12 | 8 | 14 | 10 | 7 | 12 | 8 | 6 | 4 | | | |

Zonal Lumen Summary


| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|---------|--------|-----------|--------|---------|--------|-----------|
| 0-30 | 339.26 | 3.6 | 4.7 | 90-120 | 2521.83 | 26.5 | 34.8 |
| 0-40 | 657.79 | 6.9 | 9.1 | 90-130 | 2572.83 | 27.1 | 35.5 |
| 0-60 | 1796.59 | 18.9 | 24.8 | 90-150 | 2575.59 | 27.1 | 35.5 |
| 0-90 | 4678.28 | 49.2 | 64.5 | 90-180 | 2575.59 | 27.1 | 35.5 |
| | | | | 0-180 | 7253.87 | 76.4 | 100.0 |

Total Luminaire Efficiency = 71.3%

CIE Type – Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 1.54 |
| 90-270 | 1.54 |
| Diagonal | 1.66 |

| Zone | Lumens |
|---------|---------|
| 0-10 | 40.00 |
| 10-20 | 331.02 |
| 20-30 | 660.22 |
| 30-40 | 934.51 |
| 40-50 | 1131.33 |
| 50-60 | 1272.76 |
| 60-70 | 1322.68 |
| 70-80 | 826.95 |
| 80-90 | 254.44 |
| 90-100 | 0.00 |
| 100-110 | 0.00 |
| 110-120 | 0.00 |
| 120-130 | 0.00 |
| 130-140 | 0.00 |
| 140-150 | 0.00 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

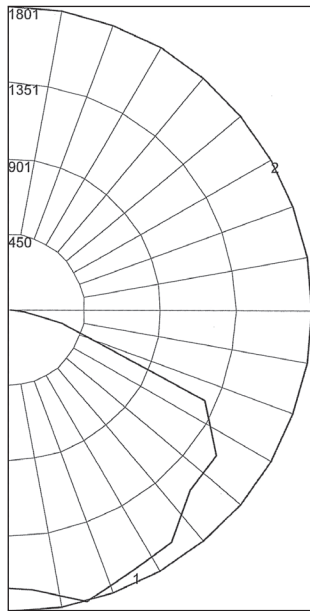

REPORT NUMBER: **CL10ST**

Lamps: 100 W High Pressure Sodium with Standard Dome Reflector

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| % Ceiling Rcc | % Walls | Rw | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
|---------------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| | | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | |
| 0 | | | 85 | 85 | 85 | 85 | 83 | 83 | 83 | 83 | 79 | 79 | 79 | 76 | 76 | 76 | 73 | 73 | 73 | 71 | | | |
| 1 | | | 76 | 71 | 68 | 64 | 74 | 70 | 66 | 63 | 67 | 64 | 61 | 64 | 61 | 59 | 61 | 59 | 57 | 56 | | | |
| 2 | | | 67 | 60 | 54 | 49 | 65 | 59 | 53 | 49 | 56 | 51 | 47 | 54 | 50 | 46 | 51 | 48 | 45 | 43 | | | |
| 3 | | | 60 | 51 | 44 | 39 | 58 | 50 | 44 | 38 | 48 | 42 | 38 | 46 | 41 | 37 | 44 | 40 | 36 | 34 | | | |
| 4 | | | 54 | 44 | 37 | 31 | 52 | 43 | 36 | 31 | 41 | 35 | 31 | 40 | 34 | 30 | 38 | 33 | 30 | 28 | | | |
| 5 | | | 49 | 39 | 31 | 26 | 48 | 38 | 31 | 26 | 36 | 30 | 25 | 35 | 29 | 25 | 33 | 29 | 25 | 23 | | | |
| 6 | | | 45 | 34 | 27 | 22 | 43 | 33 | 27 | 22 | 32 | 26 | 21 | 31 | 25 | 21 | 30 | 25 | 21 | 19 | | | |
| 7 | | | 41 | 30 | 23 | 19 | 40 | 30 | 23 | 18 | 29 | 23 | 18 | 28 | 22 | 18 | 27 | 22 | 18 | 16 | | | |
| 8 | | | 38 | 27 | 21 | 16 | 37 | 27 | 20 | 16 | 26 | 20 | 16 | 25 | 20 | 16 | 24 | 19 | 16 | 14 | | | |
| 9 | | | 35 | 25 | 18 | 14 | 34 | 24 | 18 | 14 | 24 | 18 | 14 | 23 | 18 | 14 | 22 | 17 | 14 | 12 | | | |
| 10 | | | 33 | 23 | 17 | 12 | 32 | 22 | 16 | 12 | 22 | 16 | 12 | 21 | 16 | 12 | 20 | 15 | 12 | 11 | | | |

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|---------|--------|-----------|--------|---------|--------|-----------|
| 0-30 | 1031.23 | 10.9 | 15.2 | 90-120 | 0.00 | 0.0 | 0.0 |
| 0-40 | 1965.74 | 20.7 | 29.0 | 90-130 | 0.00 | 0.0 | 0.0 |
| 0-60 | 4369.83 | 46.0 | 64.5 | 90-150 | 0.00 | 0.0 | 0.0 |
| 0-90 | 6773.90 | 71.3 | 100.0 | 90-180 | 0.00 | 0.0 | 0.0 |
| | | | | 0-180 | 6773.90 | 71.3 | 100.0 |

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

* Photometric data is based on a 100-watt clear High Pressure Sodium lamp (9,500 lumens). For candlepower values of fixtures with other lamps, use the following multipliers: 50 W HPS – 0.42 (4,000 lumens); 70 W HPS – 0.61 (6,300 lumens); and 150 W HPS – 1.68 (16,000 lumens).

NEC:

Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:

Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:

CSA Type 4X
 Exd IIB, Zone 1


Photometric Data

Total Luminaire Efficiency = 61.9%

CIE Type – Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 1.96 |
| 90-270 | 1.62 |
| Diagonal | 1.50 |

| Zone | Lumens |
|---------|--------|
| 0-10 | 34.59 |
| 10-20 | 289.50 |
| 20-30 | 587.71 |
| 30-40 | 825.38 |
| 40-50 | 944.04 |
| 50-60 | 952.84 |
| 60-70 | 900.69 |
| 70-80 | 740.88 |
| 80-90 | 607.55 |
| 90-100 | 0.00 |
| 100-110 | 0.00 |
| 110-120 | 0.00 |
| 120-130 | 0.00 |
| 130-140 | 0.00 |
| 140-150 | 0.00 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |



REPORT NUMBER: **CL10AN**

Lamps: 100 W High Pressure Sodium with 30° Angle Dome Reflector

Coefficients of Utilization – Zonal Cavity Method

| | | Effective Floor Cavity Reflectance 0.20 | | | | | | | | | | | | | | | | | | | | |
|-----------|-----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
| % Ceiling | Rcc | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| % Walls | Rw | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 74 | 74 | 74 | 74 | 72 | 72 | 72 | 72 | 69 | 69 | 69 | 66 | 66 | 66 | 63 | 63 | 63 | 63 | 63 | 63 | 62 |
| 1 | 1 | 64 | 60 | 56 | 53 | 62 | 59 | 55 | 52 | 56 | 53 | 50 | 53 | 51 | 49 | 51 | 49 | 47 | 49 | 47 | 46 | 46 |
| 2 | 2 | 57 | 51 | 45 | 41 | 55 | 49 | 44 | 40 | 47 | 43 | 39 | 45 | 41 | 38 | 43 | 40 | 37 | 37 | 33 | 30 | 28 |
| 3 | 3 | 51 | 43 | 37 | 32 | 50 | 42 | 37 | 32 | 40 | 35 | 31 | 38 | 34 | 31 | 37 | 33 | 30 | 30 | 28 | 25 | 23 |
| 4 | 4 | 47 | 38 | 31 | 26 | 45 | 37 | 31 | 26 | 35 | 30 | 26 | 34 | 29 | 25 | 32 | 28 | 25 | 23 | 20 | 19 | 19 |
| 5 | 5 | 42 | 33 | 27 | 22 | 41 | 32 | 26 | 22 | 31 | 26 | 22 | 30 | 25 | 21 | 28 | 24 | 21 | 21 | 19 | 18 | 18 |
| 6 | 6 | 39 | 29 | 23 | 19 | 38 | 29 | 23 | 18 | 28 | 22 | 18 | 26 | 22 | 18 | 25 | 21 | 18 | 18 | 16 | 15 | 15 |
| 7 | 7 | 36 | 26 | 20 | 16 | 35 | 26 | 20 | 16 | 25 | 20 | 16 | 24 | 19 | 16 | 23 | 19 | 15 | 15 | 14 | 13 | 13 |
| 8 | 8 | 33 | 24 | 18 | 14 | 32 | 23 | 18 | 14 | 22 | 17 | 14 | 22 | 17 | 14 | 21 | 17 | 13 | 13 | 12 | 11 | 11 |
| 9 | 9 | 31 | 22 | 16 | 12 | 30 | 21 | 16 | 12 | 20 | 15 | 12 | 20 | 15 | 12 | 19 | 15 | 12 | 12 | 11 | 10 | 10 |
| 10 | 10 | 29 | 20 | 14 | 11 | 28 | 19 | 14 | 11 | 19 | 14 | 11 | 18 | 14 | 11 | 18 | 13 | 11 | 11 | 10 | 9 | 9 |

Zonal Lumen Summary


| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|-------|---------|--------|-----------|--------|--------|--------|-----------|
| 0-30 | 911.80 | 9.6 | 15.5 | 90-120 | 0.0 | 0.0 | 0.0 |
| 0-40 | 1737.18 | 18.3 | 29.5 | 90-130 | 0.0 | 0.0 | 0.0 |
| 0-60 | 3634.06 | 38.3 | 61.8 | 90-150 | 0.0 | 0.0 | 0.0 |
| 0-90 | 5883.18 | 61.9 | 100.0 | 90-180 | 0.0 | 0.0 | 0.0 |
| 0-180 | 5883.18 | 61.9 | 100.0 | | | | |

Total Luminaire Efficiency = 37.8%

CIE Type – Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 1.36 |
| 90-270 | 1.36 |
| Diagonal | 1.54 |

| Zone | Lumens |
|---------|--------|
| 0-10 | 26.07 |
| 10-20 | 224.04 |
| 20-30 | 437.71 |
| 30-40 | 551.18 |
| 40-50 | 656.83 |
| 50-60 | 743.35 |
| 60-70 | 592.81 |
| 70-80 | 265.53 |
| 80-90 | 94.52 |
| 90-100 | 0.00 |
| 100-110 | 0.00 |
| 110-120 | 0.00 |
| 120-130 | 0.00 |
| 130-140 | 0.00 |
| 140-150 | 0.00 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

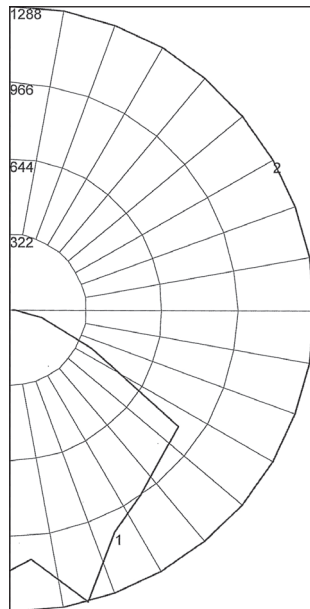

REPORT NUMBER: **CL10DD**

Lamps: 100 W High Pressure Sodium with Deep Dome Reflector

Coefficients of Utilization – Zonal Cavity Method

| | | Effective Floor Cavity Reflectance 0.20 | | | | | | | | | | | | | | | | | | | | |
|-----------|-----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
| % Ceiling | Rcc | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| % Walls | Rw | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 45 | 45 | 45 | 45 | 44 | 44 | 44 | 44 | 42 | 42 | 42 | 40 | 40 | 40 | 39 | 39 | 39 | 38 | 38 | 38 | 38 |
| 1 | 1 | 41 | 39 | 37 | 35 | 40 | 38 | 36 | 35 | 36 | 35 | 34 | 35 | 34 | 33 | 33 | 32 | 32 | 31 | 30 | 30 | 31 |
| 2 | 2 | 37 | 33 | 30 | 28 | 36 | 32 | 30 | 28 | 31 | 29 | 27 | 30 | 28 | 26 | 29 | 27 | 26 | 25 | 24 | 23 | 25 |
| 3 | 3 | 33 | 29 | 25 | 22 | 32 | 28 | 25 | 22 | 27 | 24 | 22 | 26 | 23 | 21 | 25 | 23 | 21 | 20 | 19 | 18 | 20 |
| 4 | 4 | 30 | 25 | 21 | 18 | 29 | 24 | 21 | 18 | 23 | 20 | 18 | 22 | 20 | 18 | 22 | 19 | 18 | 17 | 16 | 15 | 17 |
| 5 | 5 | 27 | 22 | 18 | 15 | 26 | 21 | 18 | 15 | 21 | 17 | 15 | 20 | 17 | 15 | 19 | 17 | 15 | 14 | 13 | 12 | 14 |
| 6 | 6 | 25 | 19 | 16 | 13 | 24 | 19 | 16 | 13 | 18 | 15 | 13 | 18 | 15 | 13 | 17 | 15 | 13 | 12 | 11 | 10 | 12 |
| 7 | 7 | 23 | 17 | 14 | 11 | 22 | 17 | 14 | 11 | 16 | 13 | 11 | 16 | 13 | 11 | 15 | 13 | 11 | 10 | 9 | 8 | 10 |
| 8 | 8 | 21 | 16 | 12 | 10 | 21 | 15 | 12 | 10 | 15 | 12 | 10 | 14 | 12 | 10 | 14 | 11 | 10 | 9 | 8 | 7 | 9 |
| 9 | 9 | 20 | 14 | 11 | 9 | 19 | 14 | 11 | 9 | 13 | 11 | 9 | 13 | 10 | 8 | 13 | 10 | 8 | 8 | 7 | 6 | 8 |
| 10 | 10 | 18 | 13 | 10 | 8 | 18 | 13 | 10 | 8 | 12 | 10 | 8 | 12 | 9 | 8 | 12 | 9 | 7 | 7 | 6 | 5 | 7 |

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|-------|---------|--------|-----------|--------|--------|--------|-----------|
| 0-30 | 687.82 | 7.2 | 19.1 | 90-120 | 0.0 | 0.0 | 0.0 |
| 0-40 | 1239.00 | 13.0 | 34.5 | 90-130 | 0.0 | 0.0 | 0.0 |
| 0-60 | 2639.18 | 27.8 | 73.5 | 90-150 | 0.0 | 0.0 | 0.0 |
| 0-90 | 3592.04 | 37.8 | 100.0 | 90-180 | 0.0 | 0.0 | 0.0 |
| 0-180 | 3592.04 | 37.8 | 100.0 | | | | |

HID/AREA: NEC/CEC EXPLOSIONPROOF

APPLETON™

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

* Photometric data is based on a 400-watt clear Pulse Start Metal Halide lamp (34,000 lumens). For candlepower values of fixtures with other lamps, use the following multipliers: 400 W HPS – 1.13 (50,000 lumens); and 250 W HPS – 0.68 (30,000 lumens).

NEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)


CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1

Photometric Data

Total Luminaire Efficiency = 81.9%

CIE Type – General Diffuse

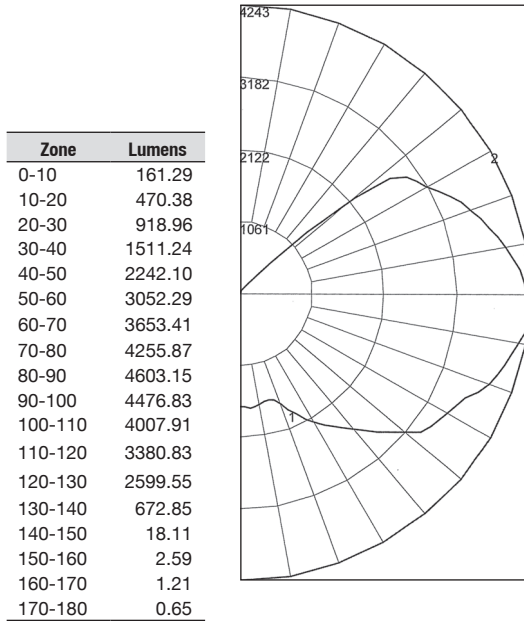

REPORT NUMBER: **CP40G**

Lamps: 400 W Pulse Start Metal Halide with Globe only

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20


| % Ceiling % Walls | Rcc Rw | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 | | | |
|----------------------|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | |
| 0 | | 89 | 89 | 89 | 89 | 83 | 83 | 83 | 83 | 72 | 72 | 72 | 61 | 61 | 61 | 52 | 52 | 52 | 47 | | | |
| 1 | | 76 | 70 | 65 | 60 | 70 | 65 | 60 | 56 | 55 | 51 | 48 | 46 | 43 | 40 | 38 | 35 | 33 | 29 | | | |
| 2 | | 67 | 59 | 51 | 45 | 62 | 54 | 48 | 42 | 45 | 40 | 36 | 37 | 33 | 30 | 30 | 27 | 24 | 20 | | | |
| 3 | | 60 | 50 | 42 | 36 | 55 | 46 | 39 | 33 | 39 | 33 | 28 | 32 | 27 | 23 | 25 | 22 | 19 | 15 | | | |
| 4 | | 55 | 43 | 35 | 29 | 50 | 40 | 32 | 27 | 33 | 27 | 23 | 27 | 22 | 19 | 22 | 18 | 15 | 12 | | | |
| 5 | | 50 | 38 | 30 | 24 | 45 | 35 | 28 | 22 | 29 | 23 | 19 | 24 | 19 | 15 | 19 | 15 | 12 | 9 | | | |
| 6 | | 45 | 34 | 26 | 20 | 41 | 31 | 24 | 18 | 26 | 20 | 16 | 21 | 16 | 13 | 17 | 13 | 10 | 8 | | | |
| 7 | | 42 | 30 | 22 | 17 | 38 | 28 | 21 | 16 | 23 | 18 | 13 | 19 | 14 | 11 | 15 | 11 | 9 | 6 | | | |
| 8 | | 39 | 27 | 20 | 15 | 35 | 25 | 18 | 14 | 21 | 15 | 12 | 17 | 13 | 9 | 14 | 10 | 7 | 5 | | | |
| 9 | | 36 | 25 | 18 | 13 | 33 | 23 | 16 | 12 | 19 | 14 | 10 | 16 | 11 | 8 | 13 | 9 | 6 | 5 | | | |
| 10 | | 33 | 22 | 16 | 11 | 31 | 21 | 15 | 10 | 18 | 12 | 9 | 15 | 10 | 7 | 12 | 8 | 6 | 4 | | | |

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|----------|--------|-----------|--------|----------|--------|-----------|
| 0-30 | 1550.63 | 3.5 | 4.3 | 90-120 | 11865.57 | 27.0 | 32.9 |
| 0-40 | 3061.87 | 7.0 | 8.5 | 90-130 | 14465.12 | 32.9 | 40.1 |
| 0-60 | 8356.25 | 19.0 | 23.2 | 90-150 | 15156.08 | 34.4 | 40.1 |
| 0-90 | 20868.68 | 47.4 | 57.9 | 90-180 | 15160.53 | 34.5 | 42.1 |
| | | | | 0-180 | 36029.22 | 81.9 | 100.0 |

Total Luminaire Efficiency = 70.4%

CIE Type – Direct

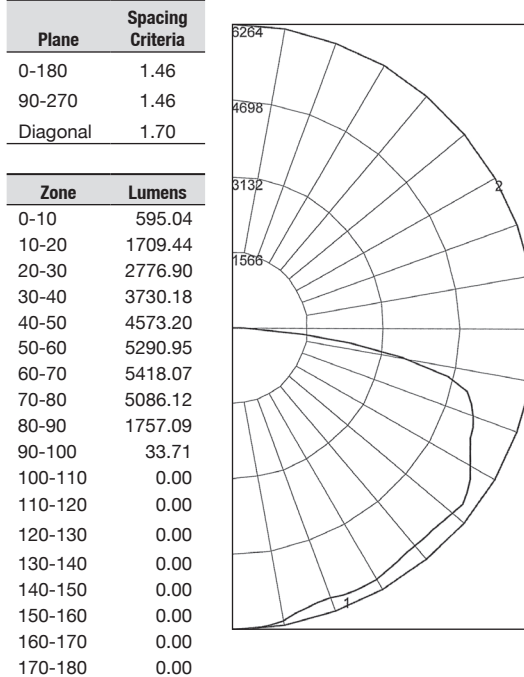

REPORT NUMBER: **CP40ST**

Lamps: 400 W Pulse Start Metal Halide with Standard Dome Reflector

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| % Ceiling % Walls | Rcc Rw | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 | | | |
|----------------------|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | |
| 0 | | 84 | 84 | 84 | 84 | 82 | 82 | 82 | 82 | 78 | 78 | 78 | 75 | 75 | 75 | 72 | 72 | 72 | 70 | | | |
| 1 | | 74 | 69 | 65 | 62 | 72 | 68 | 64 | 60 | 64 | 61 | 58 | 62 | 59 | 57 | 59 | 57 | 55 | 53 | | | |
| 2 | | 65 | 58 | 52 | 47 | 63 | 57 | 51 | 46 | 54 | 49 | 45 | 51 | 47 | 44 | 49 | 46 | 43 | 41 | | | |
| 3 | | 58 | 49 | 42 | 37 | 57 | 48 | 42 | 36 | 46 | 40 | 36 | 44 | 39 | 35 | 42 | 38 | 34 | 32 | | | |
| 4 | | 53 | 43 | 35 | 30 | 51 | 42 | 35 | 30 | 40 | 34 | 29 | 38 | 33 | 29 | 36 | 32 | 28 | 26 | | | |
| 5 | | 48 | 38 | 30 | 25 | 46 | 37 | 30 | 25 | 35 | 29 | 24 | 34 | 28 | 24 | 32 | 27 | 24 | 22 | | | |
| 6 | | 44 | 33 | 26 | 21 | 43 | 33 | 26 | 21 | 31 | 25 | 21 | 30 | 25 | 21 | 29 | 24 | 20 | 19 | | | |
| 7 | | 41 | 30 | 23 | 18 | 39 | 29 | 23 | 18 | 28 | 22 | 18 | 27 | 22 | 18 | 26 | 21 | 18 | 16 | | | |
| 8 | | 38 | 27 | 21 | 16 | 37 | 27 | 20 | 16 | 26 | 20 | 16 | 25 | 19 | 16 | 24 | 19 | 15 | 14 | | | |
| 9 | | 35 | 25 | 18 | 14 | 34 | 24 | 18 | 14 | 23 | 18 | 14 | 23 | 18 | 14 | 22 | 17 | 14 | 12 | | | |
| 10 | | 33 | 23 | 17 | 13 | 32 | 22 | 17 | 13 | 22 | 16 | 13 | 21 | 16 | 12 | 20 | 16 | 12 | 11 | | | |

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|----------|--------|-----------|--------|---------|--------|-----------|
| 0-30 | 5081.38 | 11.5 | 16.4 | 90-120 | 33.71 | 0.1 | 0.1 |
| 0-40 | 8811.56 | 20.0 | 28.5 | 90-130 | 33.71 | 0.1 | 0.1 |
| 0-60 | 18675.71 | 42.4 | 60.3 | 90-150 | 33.71 | 0.1 | 0.1 |
| 0-90 | 30936.99 | 70.3 | 99.9 | 90-180 | 33.71 | 0.1 | 0.1 |
| | | | | 0-180 | 30970.7 | 70.4 | 100.0 |

HID/AREA: NEC/CEC EXPLOSIONPROOF

APPLETON™

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

* Photometric data is based on a 400-watt clear Pulse Start Metal Halide lamp (34,000 lumens). For candlepower values of fixtures with other lamps, use the following multipliers: 400 W HPS – 1.13 (50,000 lumens); and 250 W HPS – 0.68 (30,000 lumens).

NEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1


Photometric Data

Total Luminaire Efficiency = 62.5%

CIE Type – Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 2.02 |
| 90-270 | 1.48 |
| Diagonal | 1.64 |

| Zone | Lumens |
|---------|---------|
| 0-10 | 503.08 |
| 10-20 | 1461.14 |
| 20-30 | 2434.06 |
| 30-40 | 3353.43 |
| 40-50 | 3867.50 |
| 50-60 | 3954.40 |
| 60-70 | 3752.38 |
| 70-80 | 3368.71 |
| 80-90 | 2643.39 |
| 90-100 | 1531.50 |
| 100-110 | 421.63 |
| 110-120 | 86.74 |
| 120-130 | 65.68 |
| 130-140 | 20.81 |
| 140-150 | 11.94 |
| 150-160 | 7.93 |
| 160-170 | 4.46 |
| 170-180 | 1.47 |



REPORT NUMBER: CP40AN

Lamps: 400 W Pulse Start Metal Halide with 30° Angle Dome Reflector

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| % Ceiling | Rcc | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
|-----------|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|---|
| | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | | | | |
| % Walls | Rw | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 73 | 73 | 73 | 73 | 71 | 71 | 71 | 71 | 67 | 67 | 67 | 63 | 63 | 63 | 59 | 59 | 59 | 58 | | | |
| 1 | 1 | 64 | 60 | 56 | 53 | 62 | 58 | 55 | 52 | 54 | 52 | 49 | 51 | 49 | 47 | 48 | 46 | 44 | 42 | | | |
| 2 | 2 | 57 | 51 | 45 | 41 | 55 | 49 | 44 | 40 | 46 | 42 | 38 | 43 | 40 | 37 | 40 | 38 | 35 | 33 | | | |
| 3 | 3 | 51 | 44 | 38 | 33 | 49 | 42 | 37 | 32 | 39 | 35 | 31 | 37 | 33 | 30 | 35 | 31 | 26 | 27 | | | |
| 4 | 4 | 47 | 38 | 32 | 27 | 45 | 37 | 31 | 26 | 35 | 29 | 25 | 32 | 28 | 25 | 30 | 27 | 24 | 22 | | | |
| 5 | 5 | 43 | 34 | 27 | 23 | 41 | 33 | 27 | 22 | 31 | 25 | 22 | 29 | 24 | 21 | 27 | 23 | 20 | 19 | | | |
| 6 | 6 | 39 | 30 | 24 | 19 | 38 | 29 | 23 | 19 | 27 | 22 | 18 | 26 | 21 | 18 | 24 | 20 | 17 | 16 | | | |
| 7 | 7 | 36 | 27 | 21 | 17 | 35 | 26 | 21 | 17 | 25 | 20 | 16 | 23 | 19 | 16 | 22 | 18 | 15 | 14 | | | |
| 8 | 8 | 34 | 24 | 19 | 15 | 32 | 24 | 18 | 15 | 22 | 18 | 14 | 21 | 17 | 14 | 20 | 16 | 13 | 12 | | | |
| 9 | 9 | 31 | 22 | 17 | 13 | 30 | 22 | 16 | 13 | 21 | 16 | 13 | 20 | 15 | 12 | 19 | 15 | 12 | 11 | | | |
| 10 | 10 | 29 | 20 | 15 | 12 | 28 | 20 | 15 | 12 | 19 | 14 | 11 | 18 | 14 | 11 | 17 | 13 | 11 | 10 | | | |

Zonal Lumen Summary


| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|----------|--------|-----------|--------|----------|--------|-----------|
| 0-30 | 4398.28 | 10.0 | 16.0 | 90-120 | 2039.87 | 4.6 | 7.4 |
| 0-40 | 7751.71 | 17.6 | 28.2 | 90-130 | 2105.55 | 4.8 | 7.7 |
| 0-60 | 15573.61 | 35.4 | 56.7 | 90-150 | 2138.30 | 4.9 | 7.7 |
| 0-90 | 25338.08 | 57.6 | 92.2 | 90-180 | 2152.16 | 4.9 | 7.8 |
| | | | | 0-180 | 27490.24 | 62.5 | 100.0 |

Total Luminaire Efficiency = 69.1%

CIE Type – Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 1.48 |
| 90-270 | 1.48 |
| Diagonal | 1.62 |

| Zone | Lumens |
|---------|---------|
| 0-10 | 676.92 |
| 10-20 | 1962.51 |
| 20-30 | 3199.12 |
| 30-40 | 4281.42 |
| 40-50 | 4889.12 |
| 50-60 | 5408.09 |
| 60-70 | 5456.18 |
| 70-80 | 3822.90 |
| 80-90 | 693.25 |
| 90-100 | 20.14 |
| 100-110 | 0.00 |
| 110-120 | 0.00 |
| 120-130 | 0.00 |
| 130-140 | 0.00 |
| 140-150 | 0.00 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

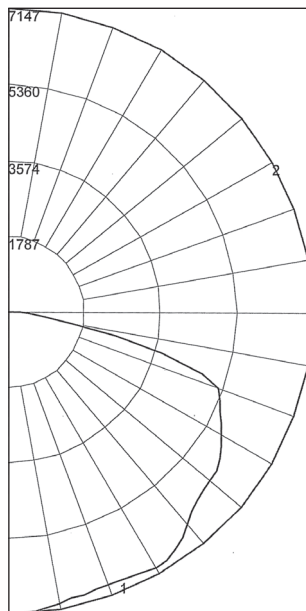

REPORT NUMBER: CP40DD

Lamps: 400 W Pulse Start Metal Halide with Deep Dome Reflector

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| % Ceiling | Rcc | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 |
|-----------|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|---|
| | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | | | | |
| % Walls | Rw | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 82 | 82 | 82 | 82 | 80 | 80 | 80 | 80 | 77 | 77 | 77 | 73 | 73 | 73 | 70 | 70 | 70 | 69 | | | |
| 1 | 1 | 74 | 70 | 66 | 63 | 72 | 68 | 65 | 62 | 65 | 63 | 60 | 63 | 60 | 58 | 60 | 58 | 57 | 55 | | | |
| 2 | 2 | 66 | 59 | 54 | 49 | 64 | 58 | 53 | 49 | 55 | 51 | 47 | 53 | 49 | 46 | 51 | 48 | 45 | 44 | | | |
| 3 | 3 | 59 | 51 | 44 | 39 | 57 | 50 | 44 | 39 | 48 | 42 | 38 | 46 | 41 | 38 | 44 | 40 | 37 | 35 | | | |
| 4 | 4 | 54 | 44 | 38 | 32 | 52 | 43 | 37 | 32 | 42 | 36 | 32 | 40 | 35 | 31 | 38 | 34 | 31 | 29 | | | |
| 5 | 5 | 49 | 39 | 32 | 27 | 47 | 38 | 32 | 27 | 37 | 31 | 27 | 35 | 30 | 26 | 34 | 29 | 26 | 24 | | | |
| 6 | 6 | 45 | 35 | 28 | 23 | 44 | 34 | 28 | 23 | 33 | 27 | 23 | 32 | 26 | 23 | 30 | 26 | 22 | 21 | | | |
| 7 | 7 | 41 | 31 | 24 | 20 | 40 | 31 | 24 | 20 | 30 | 24 | 20 | 29 | 23 | 20 | 28 | 23 | 19 | 18 | | | |
| 8 | 8 | 38 | 28 | 22 | 18 | 37 | 28 | 22 | 18 | 27 | 21 | 17 | 26 | 21 | 17 | 25 | 21 | 17 | 16 | | | |
| 9 | 9 | 36 | 26 | 20 | 16 | 35 | 25 | 20 | 16 | 25 | 19 | 16 | 24 | 19 | 15 | 23 | 19 | 15 | 14 | | | |
| 10 | 10 | 34 | 24 | 18 | 14 | 33 | 23 | 18 | 14 | 23 | 18 | 14 | 22 | 17 | 14 | 21 | 17 | 14 | 12 | | | |

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|----------|--------|-----------|--------|----------|--------|-----------|
| 0-30 | 5838.56 | 13.3 | 19.2 | 90-120 | 20.14 | 0.0 | 0.1 |
| 0-40 | 10119.98 | 23.0 | 33.3 | 90-130 | 20.14 | 0.0 | 0.1 |
| 0-60 | 20417.19 | 46.4 | 67.1 | 90-150 | 20.14 | 0.0 | 0.1 |
| 0-90 | 30389.51 | 69.1 | 99.9 | 90-180 | 20.14 | 0.0 | 0.1 |
| | | | | 0-180 | 30409.65 | 69.1 | 100.0 |

Code•Master™ 2 HID Factory Sealed Luminaires

Explosionproof, Dust-Ignitionproof

* Photometric data is based on a 400-watt clear Pulse Start Metal Halide lamp (34,000 lumens). For candlepower values of fixtures with other lamps, use the following multipliers: 400 W HPS – 1.13 (50,000 lumens); and 250 W HPS – 0.68 (30,000 lumens).

NEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Marine Type Electric Fixtures
 Outside Type (Salt Water)

CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class I, Zone 1 and 2; IIB, IIA
 Class II, Division 1, Groups E, F, G
 Class II, Division 2, Groups F, G
 Class III

CEC:
 CSA Type 4X
 Exd IIB, Zone 1


Photometric Data

Total Luminaire Efficiency = 63.4%

CIE Type – Direct

| Plane | Spacing Criteria |
|----------|------------------|
| 0-180 | 1.40 |
| 90-270 | 1.40 |
| Diagonal | 1.52 |

| Zone | Lumens |
|---------|---------|
| 0-10 | 1044.42 |
| 10-20 | 3491.70 |
| 20-30 | 5976.88 |
| 30-40 | 6632.58 |
| 40-50 | 7143.25 |
| 50-60 | 2844.46 |
| 60-70 | 634.65 |
| 70-80 | 115.54 |
| 80-90 | 20.82 |
| 90-100 | 1.23 |
| 100-110 | 0.00 |
| 110-120 | 0.00 |
| 120-130 | 0.00 |
| 130-140 | 0.00 |
| 140-150 | 0.00 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

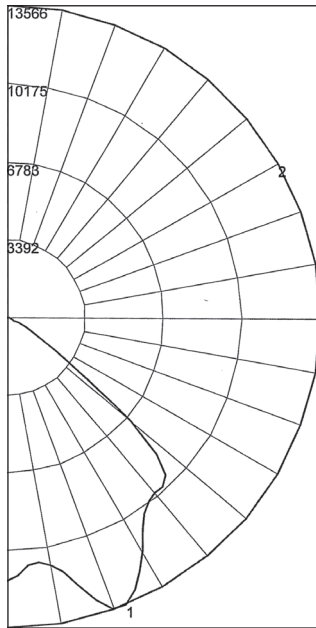

REPORT NUMBER: CP40HB

Lamps: 400 W Pulse Start Metal Halide with High Bay Reflector

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

| % Ceiling Rcc | % Walls Rw | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 | | | |
|---------------|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|--|--|--|
| | | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | |
| 0 | | 76 | 76 | 76 | 76 | 74 | 74 | 74 | 74 | 70 | 70 | 70 | 67 | 67 | 67 | 65 | 65 | 65 | 63 | | | | | | |
| 1 | | 71 | 69 | 67 | 65 | 69 | 67 | 65 | 64 | 65 | 63 | 62 | 62 | 61 | 60 | 60 | 59 | 58 | 57 | | | | | | |
| 2 | | 66 | 62 | 59 | 56 | 64 | 61 | 58 | 55 | 59 | 56 | 54 | 57 | 55 | 53 | 55 | 53 | 52 | 50 | | | | | | |
| 3 | | 61 | 56 | 52 | 48 | 60 | 55 | 51 | 48 | 53 | 50 | 47 | 51 | 49 | 46 | 50 | 48 | 46 | 44 | | | | | | |
| 4 | | 57 | 50 | 46 | 42 | 55 | 50 | 45 | 42 | 48 | 44 | 42 | 47 | 44 | 41 | 45 | 43 | 40 | 39 | | | | | | |
| 5 | | 53 | 46 | 41 | 37 | 51 | 45 | 40 | 37 | 44 | 40 | 37 | 43 | 39 | 36 | 42 | 38 | 36 | 35 | | | | | | |
| 6 | | 49 | 42 | 37 | 33 | 48 | 41 | 36 | 33 | 40 | 36 | 33 | 39 | 35 | 32 | 38 | 35 | 32 | 31 | | | | | | |
| 7 | | 46 | 38 | 33 | 30 | 44 | 37 | 33 | 29 | 37 | 32 | 29 | 36 | 32 | 29 | 35 | 31 | 29 | 28 | | | | | | |
| 8 | | 42 | 35 | 30 | 27 | 42 | 34 | 30 | 26 | 34 | 29 | 26 | 33 | 29 | 26 | 32 | 29 | 26 | 25 | | | | | | |
| 9 | | 40 | 32 | 27 | 24 | 39 | 32 | 27 | 24 | 31 | 27 | 24 | 30 | 26 | 24 | 30 | 26 | 24 | 23 | | | | | | |
| 10 | | 37 | 29 | 25 | 22 | 36 | 29 | 25 | 22 | 29 | 24 | 22 | 28 | 24 | 22 | 27 | 24 | 21 | 20 | | | | | | |

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Fixture | Zone | Lumens | % Lamp | % Fixture |
|------|----------|--------|-----------|--------|----------|--------|-----------|
| 0-30 | 10513.00 | 23.9 | 37.7 | 90-120 | 1.23 | 0.0 | 0.0 |
| 0-40 | 17145.58 | 39.0 | 61.4 | 90-130 | 1.23 | 0.0 | 0.0 |
| 0-60 | 27133.29 | 61.7 | 97.2 | 90-150 | 1.23 | 0.0 | 0.0 |
| 0-90 | 27904.30 | 63.4 | 100.0 | 90-180 | 1.23 | 0.0 | 0.0 |
| | | | | 0-180 | 27905.53 | 63.4 | 100.0 |

HID/AREA: NEC/CEC EXPLOSIONPROOF

APPLETON™