

## NEMA 4 CONNECTION HEAD WITH FLEXIBLE ARMOR CABLE

### How to build a part number:

To order an Applied Sensor Technologies temperature sensor, select the requirements for the categories listed below and fill in the corresponding boxes with your selection. Don't see exactly what you need? Give us a call!

SENSOR TYPE	ASSEMBLY STYLE	SHEATH DIAMETER	SHEATH MATERIAL	CALIBRATION	HOT JUNCTION	SHEATH LENGTH	ARMOR LENGTH	OPTIONS

#### **SENSOR TYPE**

**MI** – Mineral insulated thermocouple

#### **ASSEMBLY STYLE\***

**65** – Cast aluminum head with flexible 0.250" stainless steel armor cable; head conforms to NEMA 4 requirements; 3/4" NPT conduit connection; ceramic terminal block; gasketed screw cover with stainless steel chain; fiberglass leadwire and jacket

**65P** – PVC coated armor, Teflon insulated conductors

**65T** – Teflon coated armor, Teflon insulated conductors

#### **SHEATH DIAMETER** (in inches)

**4** – 1/8 (0.125)

**6** – 3/16 (0.188)

**7** – 1/4 (0.250)

**9** – 3/8 (0.375)

#### **SHEATH MATERIAL**

**3** – 316 stainless steel

**5** – Inconel® 600

#### **CALIBRATION** – Standard limits

**J** – Single J

**JJ** – Dual J

**K** – Single K

**KK** – Dual K

**T** – Single T

**TT** – Dual T

**E** – Single E

**EE** – Dual E

*Special limits are available – consult AST*

#### **HOT JUNCTION**

**G** – Grounded junction

**U** – Ungrounded junction


#### **SHEATH LENGTH** (Note: lengths over L84 will be shipped coiled unless otherwise specified at time of order)

**L#** – Specify overall length of sheath (e.g., L12 = 12" from tip to transition)

#### **ARMOR LENGTH**

**X#** – Specify overall length of flexible armor (e.g., X72 = 72" from terminal head to transition)

**OPTIONS** – see back page

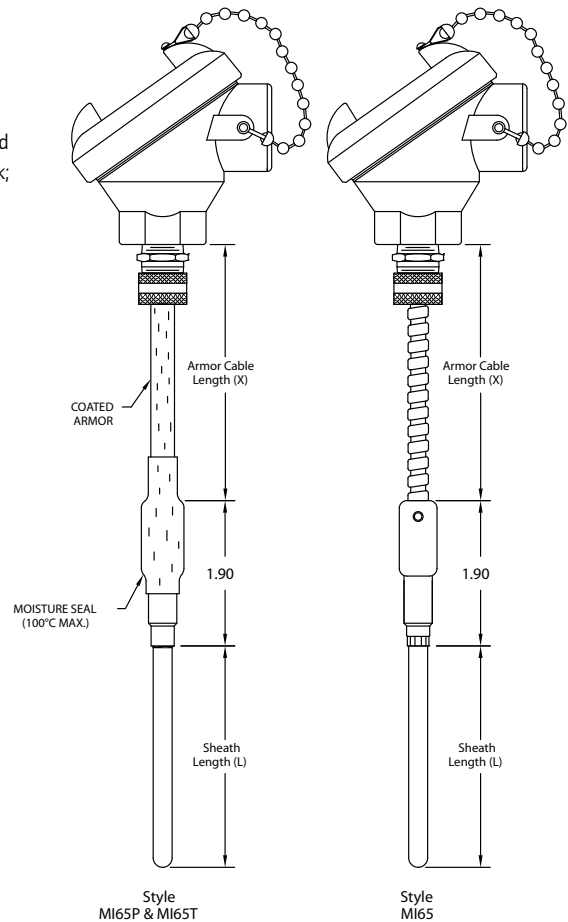

\* **NOTE:** Transition on Style 65 standardly rated for 500°F/260°C. Styles 65P & 65T rated to 212°F/100°C. For 900°F rating on Style 65, see option HT10.

# STYLE 65

## AVAILABLE OPTIONS and MODIFICATIONS

ASSEMBLY OPTIONS			
Option Code	Description		
TAG1	Stainless steel tag and wire		
B90-	90° bend in sheath (specify length from tip in inches e.g., B90-6)		
B45-	45° bend in sheath (specify length from tip in inches e.g., B45-6)		
CAL1	NIST traceable calibration [specify point(s)]		
CRT1	Certificate of conformance		
HT10	High temperature (900°F) transition (available on MI65 only)		
RB10	Replace terminal block with customer supplied part.		
RB11	Supply assembly with no terminal block inside head.		
WC20	Wiring cable gland for 0.187 - 0.312 diameter cables, for terminal heads with 1/2" NPT conduit connections		
WC21	Wiring cable gland for 0.125 - 0.187 diameter cables, for terminal heads with 1/2" NPT conduit connections		
TRANSMITTERS – For complete specs, see Transmitters section			
TR11	4-20 mA, 2-wire transmitter, single input, isolated output; specify range, units of measure (e.g., 0-200°C) and optional terminal head with *.		
TR12	4-20 mA, 2-wire transmitter, single input, non-isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.		
TR13	HART®/ 4-20 mA, 2-wire transmitter, single input, isolated output; specify range and units of measure (e.g., 0-200°C) and terminal head with *.		
COMPRESSION FITTINGS			
Option Code	NPT	Material	Ferrule
CF10	1/8"	Stainless steel	Stainless steel
CF11	1/8"	Stainless steel	Teflon®
CF12	1/8"	Brass	Brass
CF20	1/4"	Stainless steel	Stainless steel
CF21	1/4"	Stainless steel	Teflon®
CF22	1/4"	Brass	Brass
CF30	1/2"	Stainless steel	Stainless steel
CF31	1/2"	Stainless steel	Teflon®
CF32	1/2"	Brass	Brass

NEMA 4 OR 4X TERMINAL HEAD OPTIONS			
Head without ground screw	Head with internal ground screw	Process Connection	Conduit Connection
Cast aluminum, screw cover with chain, NEMA 4			
HD10*	HD11*	1/2"	1/2"
Std.*	HD13*	1/2"	3/4"
Epoxy-coated aluminum, screw cover with chain, NEMA 4X			
HD50*	HD51*	1/2"	1/2"
HD52*	HD53*	1/2"	3/4"
Cast iron, screw cover with chain, NEMA 4			
HD20*	HD21*	1/2"	1/2"
HD22*	HD23*	1/2"	3/4"
316 stainless steel, screw cover with chain, NEMA 4X			
HD40*	HD41*	1/2"	3/4"
White polypropylene, screw cover with chain, NEMA 4			
HD30	N/A	1/2"	3/4"
Black polypropylene, screw cover with chain, NEMA 4			
HD31	N/A	1/2"	3/4"
Nylon, screw cover			
HD32	N/A	1/2"	1/2"
*can be used with transmitters			

### Notes:

1. See Accessories for additional information.

WELD PADS	
WP00	Horizontal pad/flat
WP10	1" nominal pipe size
WP15	1.5" nominal pipe size
WP20	2" nominal pipe size
WP25	2.5" nominal pipe size
WP30	3" nominal pipe size
WP35	3.5" nominal pipe size
WP40	4.0" nominal pipe size