



## **DAC 106 G**

# Piezoelectric Pressure Sensor

#### Special characteristics

- Very narrow contour thanks to an M3 cable connector
- High temperature resistance (400 °C / 752 °F)
- High natural frequency
- Constant sensitivity across the entire service life

### **Description**

The sensor was developed for dynamic and quasistatic pressure detection up to 250 bar. The sensor element with Crystal Match<sup>TM</sup> technology enables exceptional signal detection across the entire temperature range. The monocrystalline GaPO<sub>4</sub> sensor element allows constant sensitivity and thus ensures excellent performance. Thanks to its size (M5x0.5 thread) and its temperature resistance up to 400 °C, the sensor is suitable for a broad range of applications.

#### **Applications**

Test stands

Development and quality assurance

For confined spaces


Technical Data				
Functional principle		Piezoelectric		
Sensor element		GaPO <sub>4</sub> (Gallium phosphate)		
Nominal pressure range	[bar]	0 250 (0 3625 psi)		
Overload	[bar]	300 (4350 psi)		
Sensitivity (nominal)	[pC/bar]	19 (1.3 pC/psi)		
Linearity	[%/FSO]	≤ ± 0.3 (0 250 bar, 0 3625 psi)		
Operating temperature	[°C]	-40 400 (-40 752 °F)		
Sensitivity coefficient	[°C <sup>-1</sup> ]	-2.1*10 <sup>-4</sup>		
Insulation resistance	[Ω]	> 10 <sup>13</sup> (25 °C / 77 °F), > 10 <sup>9</sup> (400 °C / 752 °F)		
Acceleration sensitivity	(typ.)	axial: ≤ 0.03 mbar/g (0.0004 psi/g) radial: ≤ 0.15 mbar/g (0.0002 psi/g)		
Shock	[g]	> 2000		
Natural frequency	[kHz]	160		
Capacitance (nominal)	[pF]	7.5		
Tightening torque	[Nm]	1.5		
Housing material		Stainless steel, hermetically welded		



fon

fax

© 2017 BD|SENSORS GmbH - The specifications given in this document represent the state of engineeringat the time of publishing. We reserve the right to make modifications to the specifications and materials.

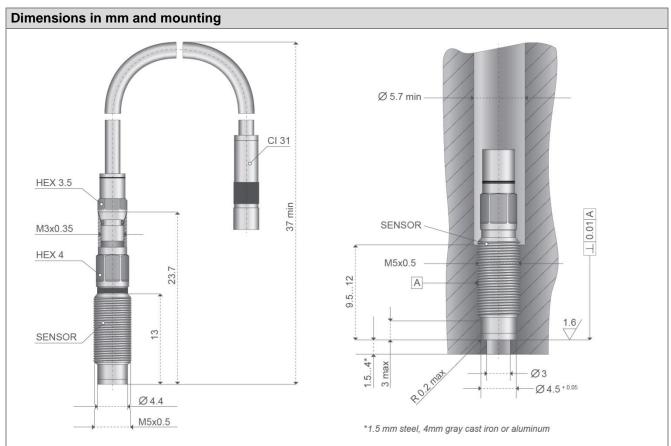

The sensor can be screwed directly into the object to be measured. The sensor front side (Ø 4.4 mm) seals the sensor in the mounting hole. Rapid changes in pressure are best detected when the volume in front of the membrane is kept as small as possible.

All cables can be removed.

Teflon piezo input cable (1 m) is included in the scope of supply.

Accessories				
Name	quantity	BDS-order number		
Piezo Input cable Teflon	2 m	BDV4712		
Piezo Input cable Teflon	3 m	BDV5041		
Piezo Input cable steel braid	1 m	BDV2444		
Piezo Input cable steel braid	2 m	BDV2446		
Piezo Input cable steel braid	3 m	BDV4954		
Piezo Input cable Viton	1 m	BDV4707		
Piezo Input cable Viton	2 m	BDV4708		
Piezo Input cable Viton	3 m	BDV5806		
M4/0.35 to BNC coupling	piece	BDU2077		