



LOFMEM™ W absolute rated membrane filter cartridges (PES)

Eaton's LOFMEM W membrane filter cartridges are the preferred choice for general water filtration, as a DI water prefilter/postfilter and for use in aqueous-based chemical processing.

LOFMEM W membrane filter cartridges use absolute rated polypropylene and polyethersulfone components that are both hydrophilic and asymmetric. Engineered specifically for economical overall filtration, they offer superior flow rates and throughputs.

Features and benefits

- High dirt-holding provides long service life and reduced maintenance requirements
- Economic absolute filtration
- All-thermal bonded construction, no adhesives
- No wetting agents
- Available in multiple configurations

Design

Filter material

Asymmetric polyethersulfone membrane

Inner core, cage, end caps

Polypropylene

Support layer

Spunbond polypropylene

Gaskets/O-rings

Silicone (standard), Buna-N, EPDM, fluorelastomer, FEP encapsulated (O-rings only)

Retention ratings

0.05, 0.1, 0.2, 0.45, 0.65 µm

Technical data

Nominal lengths

10", 20", 30", 40"
(254, 508, 762, 1016 mm)

Outside diameter

2.7" (69 mm)

Inside diameter

1.1" (27.9 mm)

Surface area

6 ft² (0.56 m²) per 10" element

Max. operating temperature

180 °F (82 °C)

Max. differential pressures

60 psid @ 80 °F (4.1 bar @ 27 °C)
30 psid @ 160 °F (2.0 bar @ 71 °C)
15 psid @ 200 °F (1.0 bar @ 93 °C)




Powering Business Worldwide

LOFMEM W membrane filter cartridges


Flow rate*

(68°F/20°C per 10" filter cartridge for water)

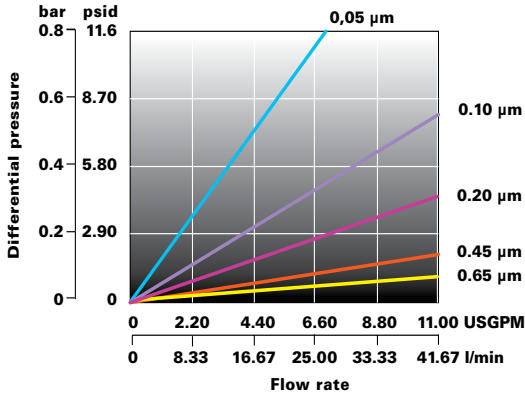

* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.

Ordering code

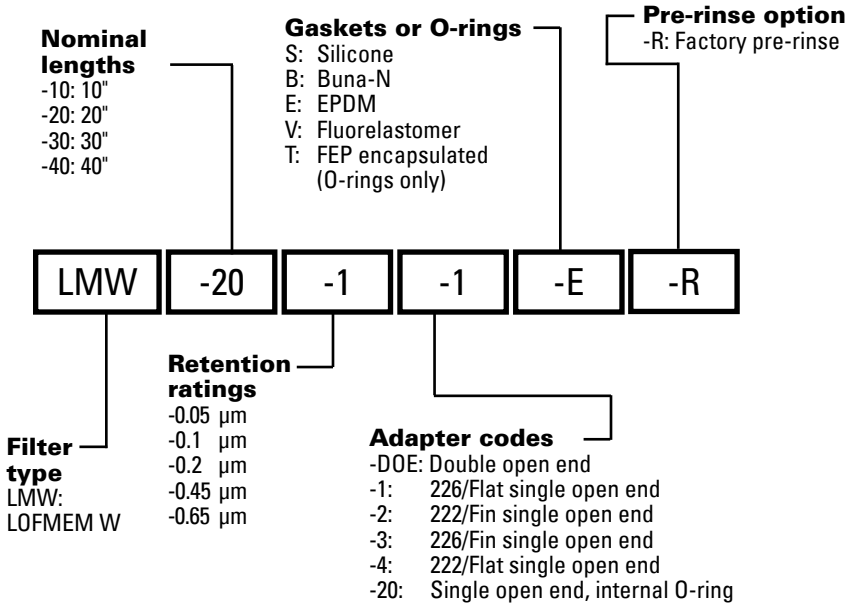

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Singapore
100G Pasir Panjang Road #07-08
Singapore 118523
Tel: +65 6825-1668

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

Brazil
Rua Clark, 2061 - Macuco
13279-400 - Valinhos, Brazil
Tel: +55 11 3616-8400

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-LMW
05-2018