

757 Series Blanking Plugs

Increased Safety and Flameproof

Cable Gland Accessories.

NEC/CEC:

Class I, Groups A, B, C, D
Class II, Groups E, F, G
Class III
Zone 1 AEx de II
Type 4X, Ex e II
IP68

ATEX/IECEX:

Ⓢ II 2 GD Ex d IIC and Ex e II
Zone 1, Zone 2, Zone 21 and Zone 22 - Gas
Groups IIA, IIB, IIC
Ⓢ IM 2 Ex d I and Ex e I
IP66/68

Applications

- Blanking plugs are designed for use from the outside of the enclosure to permanently or temporarily close any unused entries.
- Idea for use on flameproof, increased safety electrical equipment in hazardous areas.
- In general, care should be taken to ensure that a suitable entry thread sealing washer is also selected and installed, where applicable, to ensure that an effective seal is made at the entry, thereby maintaining the integrity of the enclosure or equipment I.P. rating.



Features

- Catering to hazardous area applications, the range of products covers a number of different design types which are supplied in both metal and plastic (Exe only).
- Triple certification Ex d/Ex e/Ex nR.
- Hexagon head allows for the installation or remove of the plug with either an open ended or ring type spanner or wrench.

Standard Materials

- Nickel plated brass

Options

- Copper-free aluminum: replace suffix -5 with 1
- Brass version: remove last digit 5
- 316L stainless steel version: replace last digit 5 with 4
- Plastic (see BVE series)

Optional Accessories

- Shroud, locknut, earth tag, entry thread seal, serrated washers, adaptors and reducers: see *Cable Gland Accessories* pages.

NEC/CEC Certifications and Compliances

- UL Standard: E60079-0, E60079-1, E60079-7
- CSA Standard: CAN/CSA E60079-0, CAN/CSA E60079-1, CAN/CSA E60079-7
- cCSAus Certified: 113642

ATEX/IECEX Certifications and Compliances

- Certification Type 757
 - Gas: Zones 1
 - Type of Protection: Ex d IIC Gb, Ex e IIC Gb
 - Dust: Zone 20
 - Type of Protection: Ex ta IIIC Da
- Conforming to ATEX 94/9/CE: Ⓢ II 2G 1D
- Operating Temperature: -60 °C to +200 °C (-76 °F to +392 °F) (Metallic)
- CE Declaration of Conformity: DC07001
- ATEX Certificate: Sira 13ATEX1265X
- IECEX Certificate: IECEX SIR 13.0094X
- Other Certifications: UL, cCSAus
- Marine Approval: LLOYDS, DNV, ABS
- Index of Protection according EN/IEC 60529: IP66 or IP68 with seal


INMETRO Certification

- INMETRO Certificate: TÜV 12.1333X

EURASEC Certification

- TC RU C-GB.Г505.B.00138

Dimensions in Millimeters (Inches)

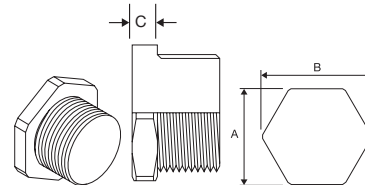

757 Series Blanking Plugs


Increased Safety and Flameproof

Cable Gland Accessories.

NEC/CEC:
 Class I, Groups A, B, C, D
 Class II, Groups E, F, G
 Class III
 Zone 1 AEx de II,
 Type 4X, Ex e II
 IP68

ATEX/IECEX:
 ATEX ① II 2 GD Ex d IIC and Ex e II
 Zone 1, Zone 2, Zone 21 and Zone 22 - Gas
 Groups IIA, IIB, IIC
 ② IM 2 Ex d I and Ex e I
 IP66/68

Catalog Numbering Guide

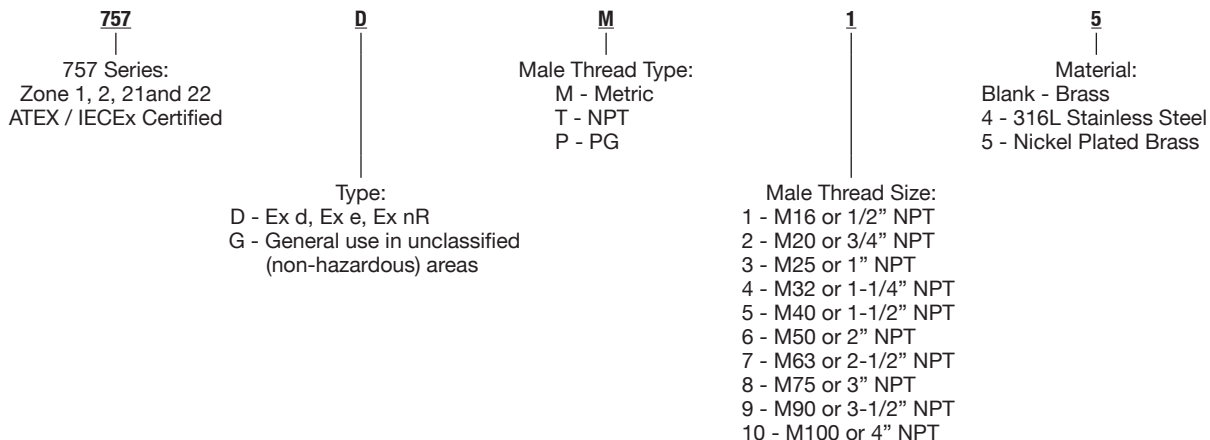

Dimensions in Millimeters (Inches)

Flats A	Corners B	C	Catalog Numbers (Nickel Plated Brass)		Weight kg (lb)		
			Metric ②	NPT			
24.0 (0.94)	26.0 (1.02)	5.0 (0.20)	M16 x 1.5	757DM15	1/2	757DT15	0.05 (0.11)
24.0 (0.94)	26.0 (1.02)	5.0 (0.20)	M20 x 1.5	757DM25	3/4	757DT25	0.07 (0.15)
30.0 (1.18)	33.0 (1.30)	5.0 (0.20)	M25 x 1.5	757DM35	1	757DT35	0.10 (0.22)
36.0 (1.42)	40.0 (1.57)	5.0 (0.20)	M32 x 1.5	757DM45	1-1/4	757DT45	0.16 (0.35)
46.0 (1.81)	51.0 (2.01)	6.0 (0.24)	M40 x 1.5	757DM55	1-1/2	757DT55	0.32 (0.71)
55.0 (2.17)	61.0 (2.40)	6.0 (0.24)	M50 x 1.5	757DM65	2	757DT65	0.42 (0.93)
70.0 (2.76)	78.0 (3.07)	6.0 (0.24)	M63 x 1.5	757DM75	2-1/2	757DT75	0.63 (1.39)
80.0 (3.15)	89.0 (3.50)	6.0 (0.24)	M75 x 1.5	757DM85	3	757DT85	0.98 (2.16)
95.0 (3.74)	106.0 (4.17)	6.0 (0.24)	M90 x 2	757DM95	3-1/2	757DT95	1.35 (2.98)
110.0 (4.33)	123.0 (4.84)	6.0 (0.24)	M100 x 2	757DM105	4	757DT105	1.60 (3.53)

Thread Table

	Metric	NPT	PG
1	M16	1/2	PG9
2	M20	3/4	PG11
3	M25	1	PG13.5
4	M32	1-1/4	PG16
5	M40	1-1/2	PG21
6	M50	2	PG29
7	M63	2-1/2	PG36
8	M75	3	PG42
9	M90	3-1/2	PG48
10	M100	-	-

① IP68 with entry thread seal or O-Ring not supplied, see Cable Gland Accessories and Tools.

② Entry thread seal not supplied, see Cable Gland Accessories and Tools.